
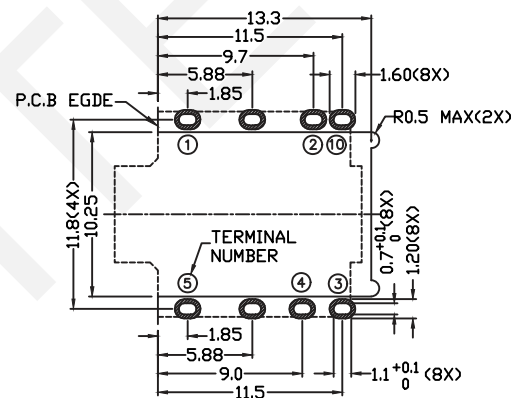


Ø3.5 MATE PLUG



PCB LAYOUT
(TOP VIEW)

Technical Parameters:

Rated Voltage: DC 30V

Rated Current: 0.5 A

Contact Resistance: 0.03Ω, Max

Insulation Resistance: 100MΩ, Min

Pressure: AC500V(50Hz)/1minute

Insertion Force: 2-20 N

Life: 50000 Times

Operating Temperature: -30°C~70°C

Material:

Terminal 1 : Stainless Steel

Terminal 2 : Copper Alloy

Terminal 3 : Copper Alloy

Terminal 4 : Copper Alloy

Terminal 5 : Copper Alloy

Terminal 10 : Copper Alloy

Shield : Copper Alloy

Housing : PA6T

ORDER INFORMATION

RHTAY20PJ3.5-012

3.5mm SMD Stereo Jack

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

SMD Stereo Jack

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAY20PJ3.5-012