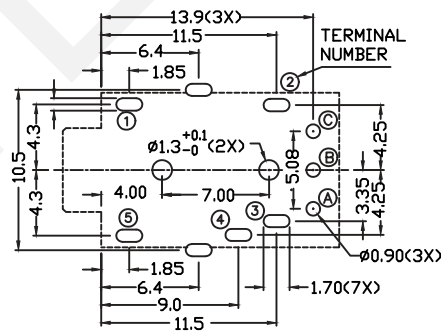


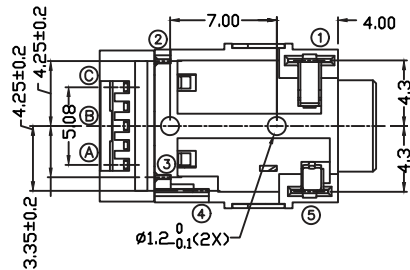


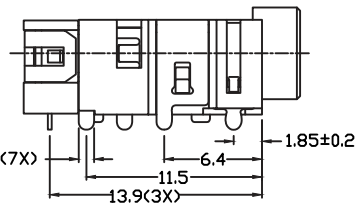


PCB LAYOUT
(BOTTOM VIEW)

Technical Parameters:
Rated Voltage:DC 30V
Rated Current: 0.5 A
Contact Resistance:0.03Ω,Max
Insulation Resistance:100MΩ,Min
Pressure:AC500V(50Hz)/1minute
Insertion Force:2-20 N
Life: 50000 Times
Operating Temperature:-30°C~70°C

Material:
Terminal 1 : Copper Alloy
Terminal 2 : Copper Alloy
Terminal 3 : Copper Alloy
Terminal 4 : Copper Alloy
Terminal 5 : Copper Alloy
Shield : Brass
Housing-1/2,Cover : PA9T

ORDER INFORMATION

RHTAYJ03.5-002
3.5mm Stereo Jack/OPTO