
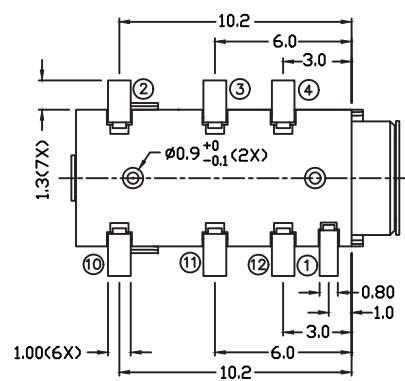
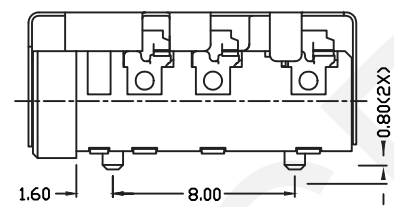

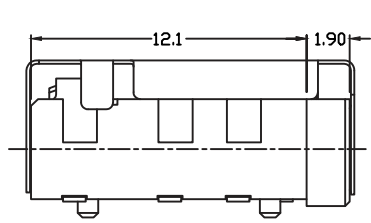


Ø3.5 MATE PLUG

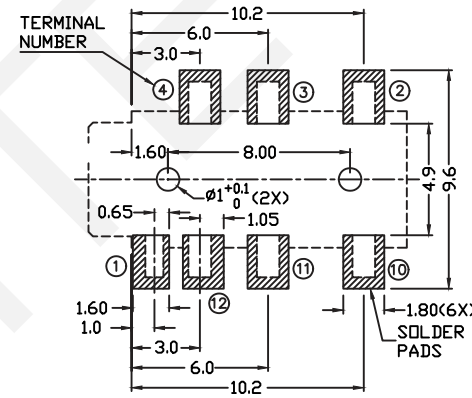

RECOMMENDED
SOLDER PAD LAYOUT

Technical Parameters:
Rated Voltage:DC 30V
Rated Current: 0.5 A
Contact Resistance:0.03Ω,Max
Insulation Resistance:100MΩ,Min
Pressure:AC500V(50Hz)/1minute
Insertion Force:2~20 N
Life: 50000 Times
Operating Temperature:-30°C~70°C
Material:
Terminal 1 : Copper Alloy
Terminal 2 : Copper Alloy
Terminal 3 : Copper Alloy
Terminal 4 : Copper Alloy
Terminal 10 : Brass
Terminal 11 : Brass
Terminal 12 : Brass
Shield : Stainless Steel
Housing : PA6T

ORDER INFORMATION
RHTAYPJ3.5-004A

3.5mm SMD Stereo Jack
Schematic See Annex

MODEL NO	004	004A	004B	004C	004D
SCHEMATIC					