
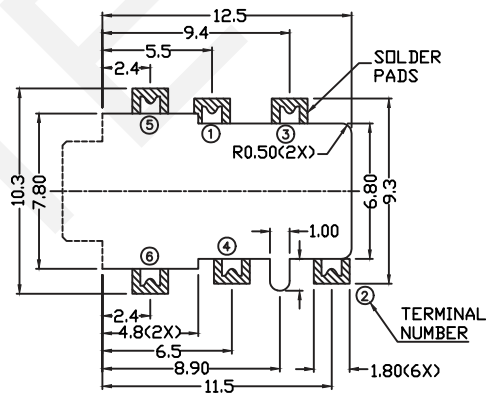


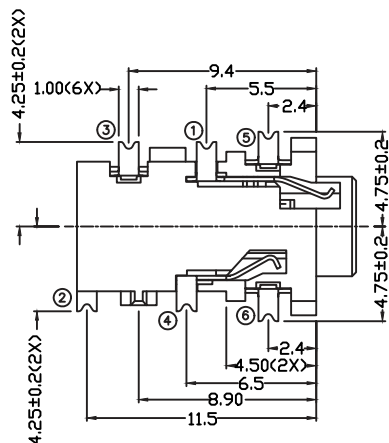





Ø3.5 MATE PLUG



RECOMMENDED
SOLDER PAD LAYOUT

Technical Parameters:

Rated Voltage:DC 30V

Rated Current: 0.5 A

Contact Resistance:0.03Ω,Max

Insulation Resistance:100MΩ,Min

Pressure:AC500V(50Hz)/1minute

Insertion Force:2~20 N

Life: 50000 Times

Operating Temperature:-30°C~70°C

Material:

Terminal 1: Copper Alloy

Terminal 2: Copper Alloy

Terminal 3: Copper Alloy

Terminal 4: Copper Alloy

Terminal 5: Copper Alloy

Terminal 6: Copper Alloy

Housing : PA6T

Tape : Polyimide

ORDER INFORMATION

RHTAYPJ3.5-006

3.5mm SMD Stereo Jack

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

SMD Stereo Jack

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAYPJ3.5-006

1

2

3

4

5

6

7

8

9