

1 2 3 4 5 6 7 8 9

A

A

B

B

C

C

D

D

E


E

F

F

G

G

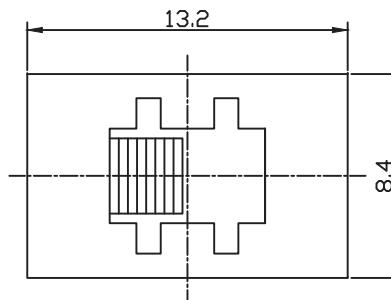

SPECIFICATIONS

Rating: 0.3A 50VDC




Contact Resistance: 50MΩ max

Insulation Resistance: 500VDC 100MΩ Min

Dielectric Strength: 100V AC 1 Minute

Operating Force: 100gf~800gf

Electrical Life: >10,000 cycles

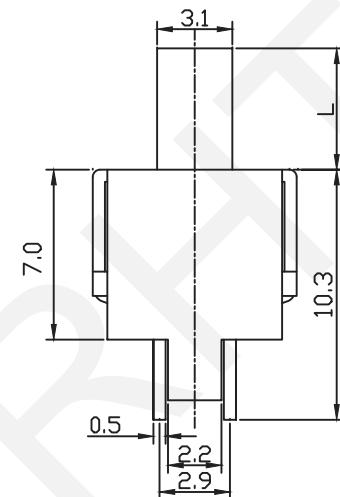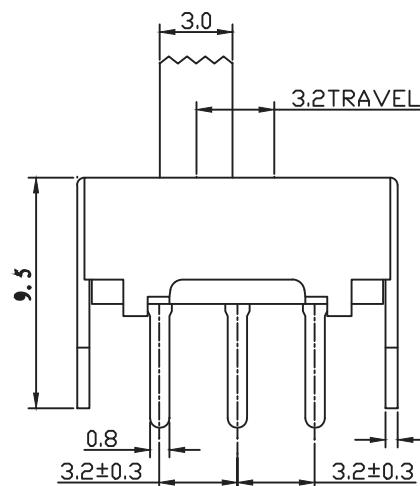

SCHEMATIC

ORDER INFORMATION

RHTGYS32 -2 2 F 03 - X X -X

Slide Switch Type

Pole

Throw


Travelling

C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P

4.5	5.0	5.5	6.0	7.0	8.0
-----	-----	-----	-----	-----	-----

Sequential No.

Knob Type



Knob Height

Operating Force



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Slide Switch Series

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTGYS32-22F03-XX-X

1

2

3

4

5

6

7

8

9