

A

A

B

B

C

C

D

D

E


E

F

F

G

G



SPECIFICATIONS

Rating: 0.3A 50VDC




Contact Resistance: 30MΩ max

Insulation Resistance: 500VDC 100MΩ Min


Dielectric Strength: 500V AC 1 Minute

Operating Force: 100gf~800gf

Electrical Life: >10,000 cycles

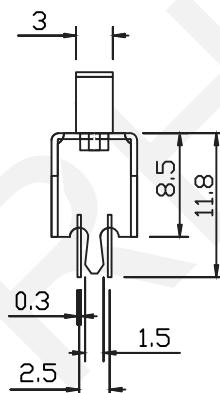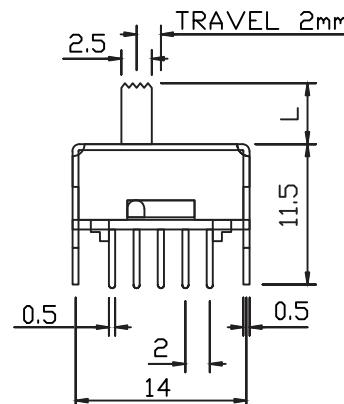

SCHEMATIC

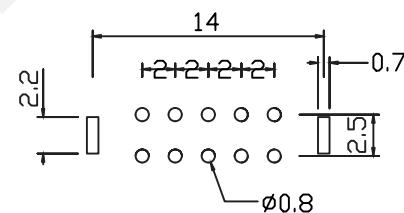

ORDER INFORMATION

RHTGYS42 -2 3 D 28 - X X -X

Slide Switch Type

Pole

Throw

Travelling

C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P

4.5	5.0	5.5	6.0	7.0	8.0
-----	-----	-----	-----	-----	-----

Sequential No.

Knob Type

RG	G	TG	VG	EG	CG
----	---	----	----	----	----

Knob Height

Operating Force

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

0~3

3~18

18~50

50~120

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

Slide Switch Series



RHTGYS42-23D28-XX-X