



1 2 3 4 5 6 7 8 9

A

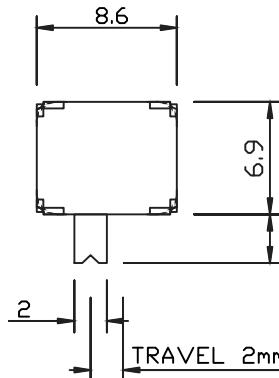

B

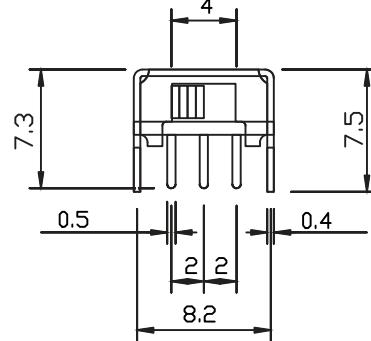

C

#### SPECIFICATIONS

Rating: 0.3A 50VDC


Contact Resistance: 30MΩ max

Insulation Resistance: 500VDC 100MΩ Min



Dielectric Strength: 500V AC 1 Minute

Operating Force: 100gf~800gf

Electrical Life: 10,000 cycles



SCHEMATIC

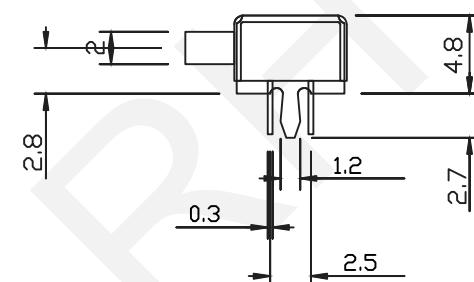

P.C.B. HOLE DETAIL

#### ORDER INFORMATION

RHTGYK30 - 2 2 D 13 - X X - X

Slide Switch Type

Pole

Throw

#### Travelling

C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Sequential No.

#### Knob Type

RG	G	TG	VG	EG	CG
----	---	----	----	----	----

Knob Height

Operating Force



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

Slide Switch Series



RHTGYK30-22D13-XX-X

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

G