

# SPECIFICATIONS

Rating: 0.5A 50VDC

Contact Resistance: 30MΩ max

Insulation Resistance: 500VDC 100MΩ Min

Dielectric Strength: 500V AC 1 Minute

Operating Force: 100gf~800gf

Electrical Life :10,000 cycles

## ORDER INFORMATION

RHTGYS45 -2 3 F 35 - X X -X

Slide Switch Type


Pole

Throw

| Travelling |     |     |     |     |     |
|------------|-----|-----|-----|-----|-----|
| C          | D   | E   | F   | G   | H   |
| 1.5        | 2.0 | 2.5 | 3.0 | 3.5 | 4.0 |
| I          | J   | K   | L   | N   | P   |
| 4.5        | 5.0 | 5.5 | 6.0 | 7.0 | 8.0 |




Sequential No.

Knob Type



Knobe Height

Operating Force

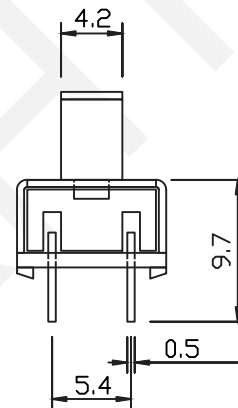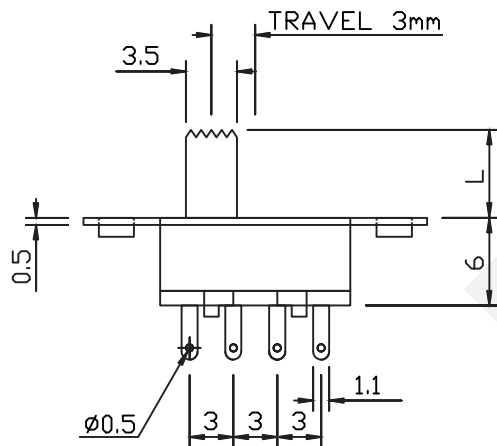

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Slide Switch Series

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTGYS45-23F35-XX-X

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9