

1 2 3 4 5 6 7 8 9

A

A

B

B

C

C

D

D

E



E

F

F

G

G

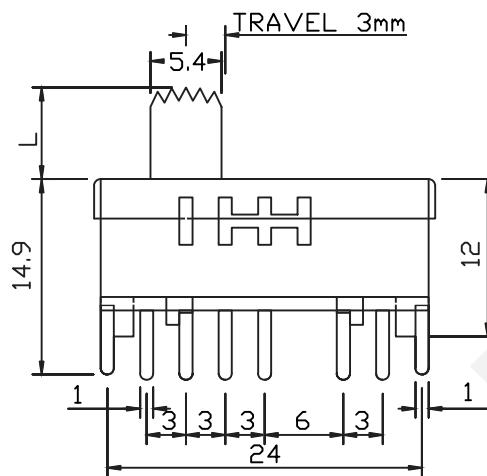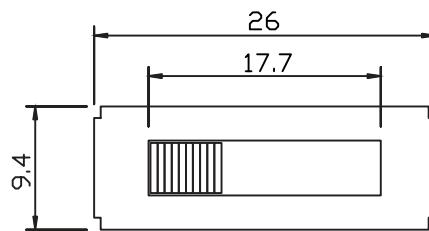

SPECIFICATIONS

Rating: 0.3A 50VDC


Contact Resistance: 30MΩ max

Insulation Resistance: 500VDC 100MΩ Min


Dielectric Strength: 500V AC 1 Minute

Operating Force: 100gf~800gf

Electrical Life: 10,000 cycles



SCHEMATIC

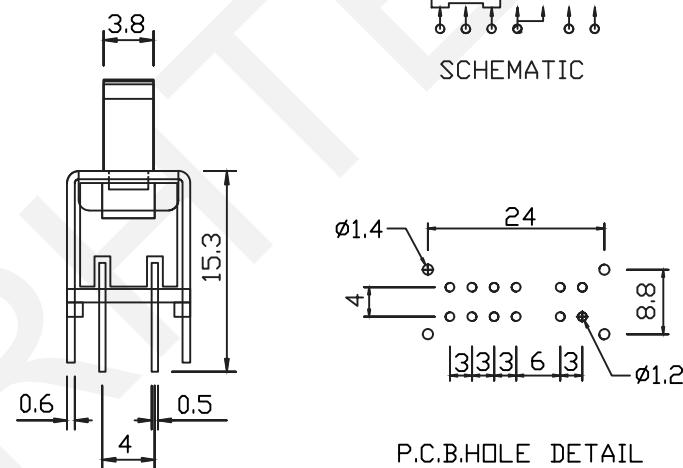

P.C.B. HOLE DETAIL

ORDER INFORMATION

RHTGYS64 -2 5 F 02 -X X -X

Slide Switch Type _____
Pole _____
Throw _____

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Sequential No. _____

Knob Type					
RG	G	TG	VG	EG	CG

Knob Height _____

Operating Force _____



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

Slide Switch Series



RHTGYS64-25F02-XX-X

1

2

3

4

5

6

7

8

9