



1 2 3 4 5 6 7 8 9

A

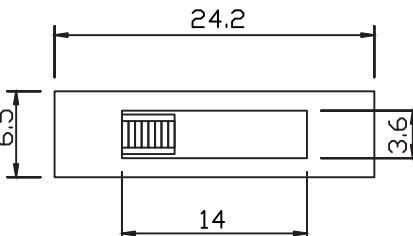


B

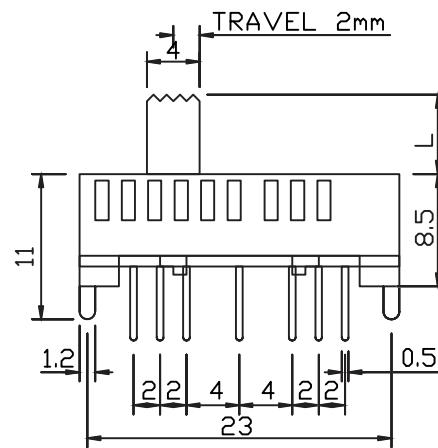



C

SPECIFICATIONS

Rating: 0.3A 50VDC
Contact Resistance: 30MΩ max
Insulation Resistance: 500VDC 100MΩ Min
Dielectric Strength: 500V AC 1 Minute
Operating Force: 100gf~800gf
Electrical Life: 10,000 cycles



SCHEMATIC

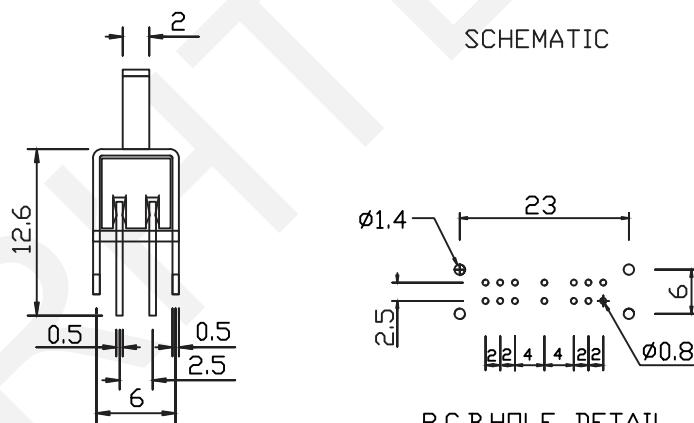

P.C.B. HOLE DETAIL

ORDER INFORMATION

RHTGYS65 -2 5 D 02 -X X -X

Slide Switch Type _____
Pole _____
Throw _____

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Sequential No. _____

Knob Type					
RG	G	TG	VG	EG	CG

Knob Height _____

Operating Force _____

F

G



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	APP'D BY ZHAN
±0.12	±0.15	±0.3	±0.5		

Slide Switch Series



RHTGYS65-26D02-XX-X

1 2 3

4 5 6 7 8 9

A

B

C

D

E

F

G