

SPECIFICATIONS

Rating: 0.3A 50VDC




Contact Resistance: 30MΩ max

Insulation Resistance: 500VDC 100M Ω Min


Dielectric Strength: 500V AC 1 Minute

□perating Force:100gf~800gf

Electrical Life :10,000 cycles

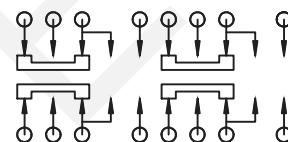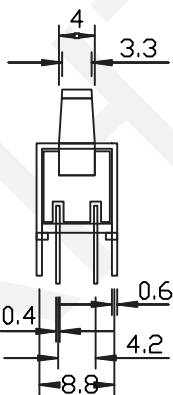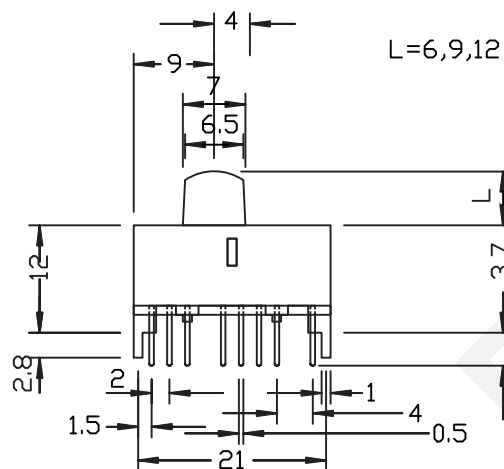

SCHEMATIC

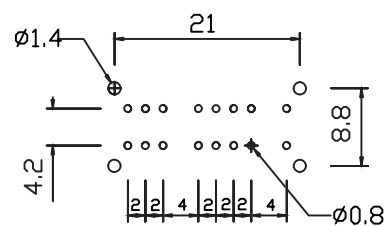

P.C.B.HOLE DETAIL

ORDER INFORMATION

RHTGYS73 - 4 2 H 08 -X X -X

Slide Switch Type-

Pole

Throw

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Sequential No.

Knob Type
     
RG G TG VG EG CG

Knobe Height

Operating Force



RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18

3~50 50~120

CHK'D BY FENG

 ± 0.12 $\pm 0,15$

$\pm 0,3$	$\pm 0,5$
-----------	-----------

APPR BY ZHAN

Slide Switch Series

THIRD ANGLE PROJECTION



RHTGYS73-42H08-XX-X