

SPECIFICATIONS

Rating: 0.3A 50VDC




Contact Resistance: 30M Ω max

Insulation Resistance: 500VDC 100M Ω Min


Dielectric Strength: 500V AC 1 Minute

Operating Force: 100gf~800gf

Electrical Life :10,000 cycles

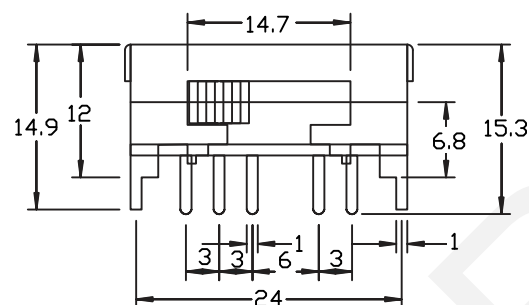

SCHEMATIC

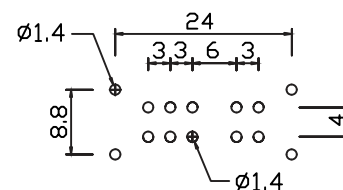

P.C.B.HOLE DETAIL

ORDER INFORMATION

RHTGYK37 -2 4 F 01 - X X -X

Slide Switch Type

Pole

Throw

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Sequential No.

Knob Type					
RG	G	TG	VG	EG	CG

Knobe Height

Operating Force

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN

Slide Switch Series	
THIRD ANGLE PROJECTION	RHTGYK37-24F01-XX-X