



SPECIFICATIONS

Rating: 0.5A 50VDC
 Contact Resistance: 30M Ω max
 Insulation Resistance: 500VDC 100M Ω Min
 Dielectric Strength: 500V AC 1 Minute
 Operating Force: 100gf~800gf
 Electrical Life :10,000 cycles



SCHEMATIC

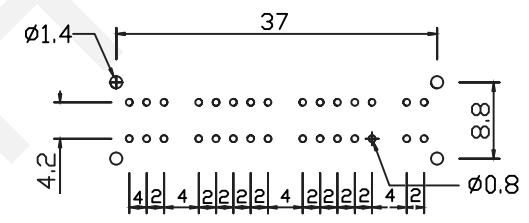

P.C.B.HOLE DETAIL

ORDER INFORMATION

RHTGYK52 - 6 4 D 01 - X X - X

Slide Switch Type ☐

Pole ☐

Throw ☐

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Sequential No. ☐

Knob Type					
RG	G	TG	VG	EG	CG

Knobe Height ☐

Operating Force ☐