



1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---


A

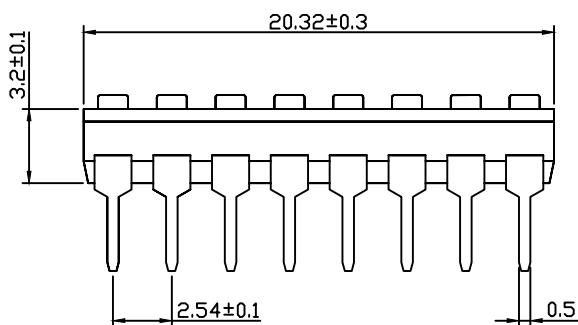


B




C

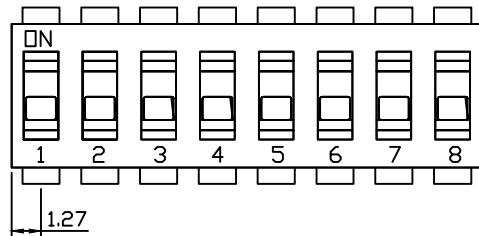

D

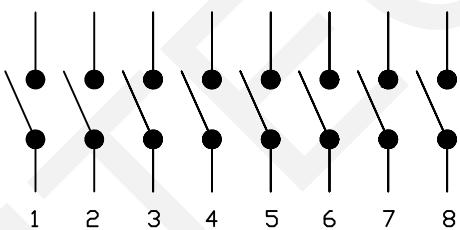

E

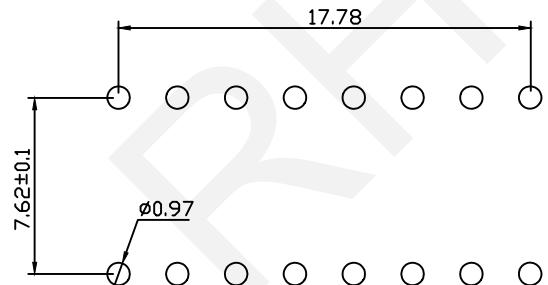

Recommended PCB Layout
Tolerance:±0.5mm

Notes:

1.Material:

Switch cover:PPS UL94V-0

Switch Body:PPS UL94V-0

Action Bars:PA46 UL94V-0

Paddle: High Temperature Nylon

Shrapnel:Beryllium Copper,Gold-Plated

Terminal:Brass,Gold-Plated

2.Electric:

Rated Current:No Switching:100mA@50VDC

Switching:25mA@24VDC

Contact Resistance:≤50mΩ Max

Insulator Resistance:≥100 MΩ Min

Insulation strength:500VAC/1min


Durability:2000 Cycles

Force:500gf Max

Operating Temperature:-30°C~85°C(ND ICE)

ORDER INFORMATION

RHTGYM-08-N-0 0

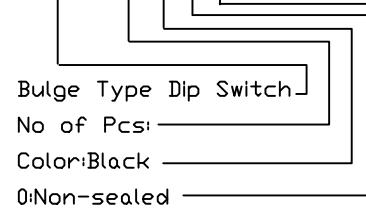

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	2.54 DIP Switch
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	THIRD ANGLE PROJECTION

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---

RHTGYM

