




Switching Characteristics:
 Mechanical Life:20000 operations per switch
 Operation Force:1000gf max.
 Stroke:2.0mm
 Operation Temp:-20°C~+70°C
 Electrical Life:20000 operations per switch-24 VDC 25mA
 Contact Resistance:50 Max. at initial
 Non-Switching Rating:100mA, 50VDC
 Switching Rating:25mA, 24VDC
 Circuit:Single pole single throw
 Contact:Half Gold/Sn

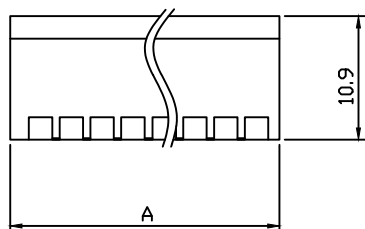

Model No	NO.Pos	A
RHTGYPTR-01	1	4.10
RHTGYPTR-02	2	6.64
RHTGYPTR-03	3	9.18
RHTGYPTR-04	4	11.72
RHTGYPTR-05	5	14.26
RHTGYPTR-06	6	16.80
RHTGYPTR-07	7	19.34
RHTGYPTR-08	8	21.88
RHTGYPTR-09	9	24.42
RHTGYPTR-10	10	26.96
RHTGYPTR-12	12	32.04

Order Information
 RHTGYPTR-XX-XX-X-X

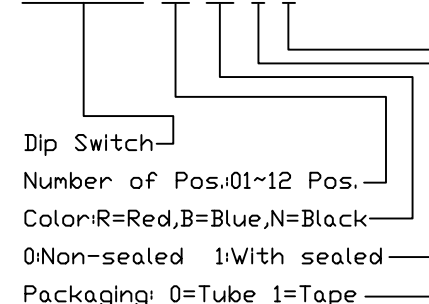

Soldering and Cleaning Processes
 Keep all switch contacts in their "OFF" position for all operations

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

SPST Standard Plano Type Recessed

THIRD ANGLE PROJECTION



RHTGYPTR