


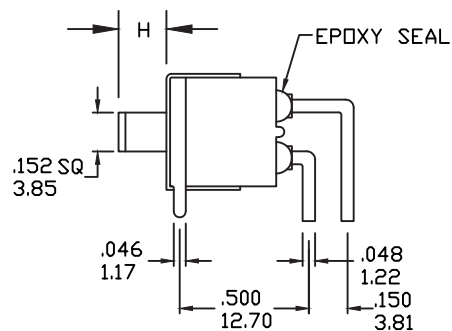


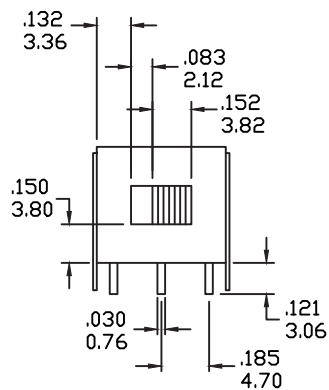


model no.	switching position		
RHTGYS-11P	on	none	on
RHTGYS-12P	on	off	on
term comm.	2-3 5-4	open	2-1 5-6

Actuator	H	Actuator color	
A1	4.72	1	White
A2	6.96	2	Black
A3	8.96	9	Gray
A4	3.10		
A6	11.92		

schematic



P.C.B MOUNTING

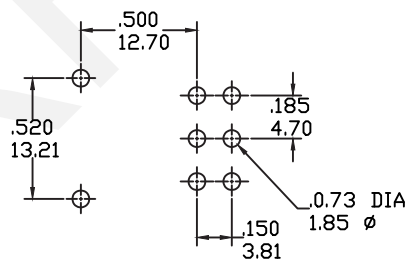

Materials:

Slide Handle: Nylon

Housing: Stainless Steel

Case: Dialyl phthalate (DAP)

Contact and Terminal: Copper alloy, silver plated.

Specifications:

Contact Rating: 5A@120 VAC or 28 VDC; 3A@250 VAC

Electrical Life: 30000 make and break cycles at full load

Contact Resistance: 10mΩ max. initial @ 2-4 VDC, 100mA

Insulation Resistance: 1000MΩ min.

Dielectric Strength: 1500 V RMS@sea level

Operating Temperature: -30°C to +85°C

ORDER INFORMATION

Product NO: RHTGYS-11P-A1-2-Q-E-H

Switches Function: DPDT on-none-on

Actuator: A1=5.08, A2=7.35, A3=9.40,

A4=3.60, A5=5.08, A6=12.32, A7=4.20

Actuator color: 1-white, 2-black (std.), 9-gray

Contact Material: Q-silver plated,

R-gold plated, G-gold over silver

E-epoxy seal

RoHS code: H-RoHS Compliant

NINGBO RHT ELECTRONIC CO., LTD

UNITS: mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

DPDT Miniature Slide Switches

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTGYS-11P-A1