
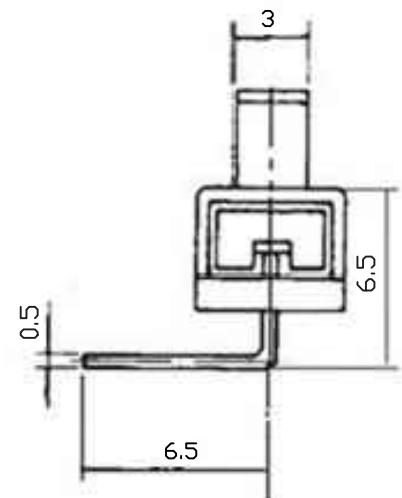
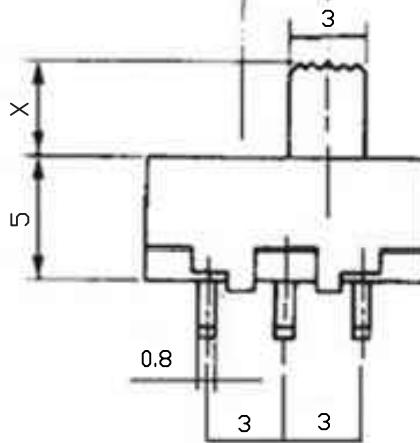


1 2 3 4 5 6 7 8 9

A

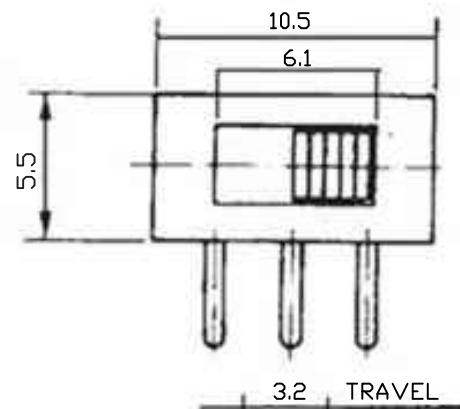

SPECIFICATIONS

Rating: 0.5A 50 VDC

Contact Resistance: 50MΩ max

Insulation Resistance: 500VDC 100MΩ Min


Dielectric Strength: 100V AC 1 Minute

Operating Force: 100gf~800gf

Electrical Life: >10,000 cycles

ORDER INFORMATION

RHTGYS-12F19-G5



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Slide switch (1P2T),RoHS

0~3

3~18

18~50

50~120

CHK'D BY FENG


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTGYS-12F19-G5

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

G