



1 2 3 4 5 6 7 8 9


A

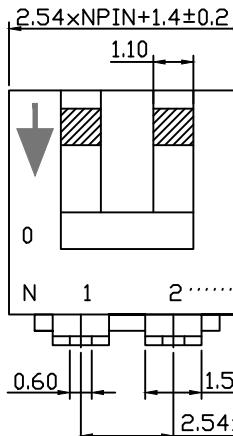


B

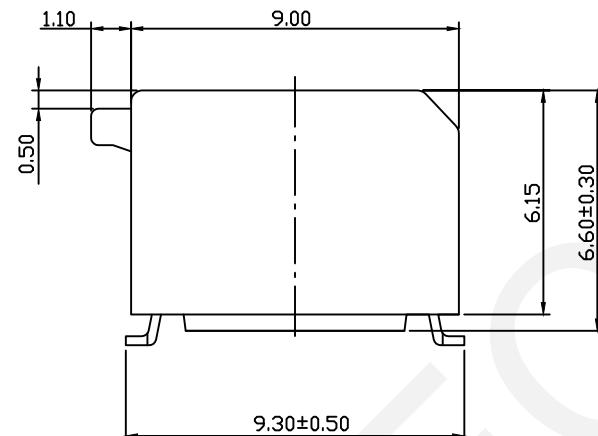

C

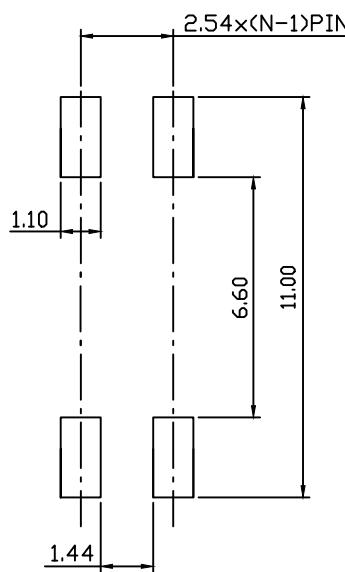

D

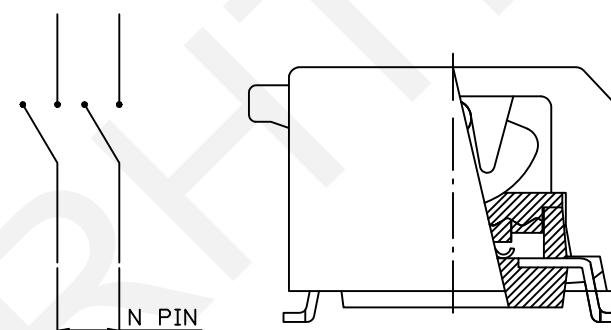

SCHEMATIC

RECOMMENDED P.C.B. LAYOUT(TOP VIEW)

Notes:

1.Material:

Actuator:UL94V-0,White/UL94V-0,Black

Movable: Copper Alloy,3u" Gold Plated

Terminal:Brass,1u"/Min.Gold Flash On Solderrial

3u" Gold Plating On Contact Area

50u" Nickel Plating Under Plating Overall

Base:UL94V-0, Black

2.Electric:

Operating Force: 500gf Max

Operating Temperature:-30°C~85°C

Storage Temperature: -40°C ~85°C

Mechanical Life: 3000 Cycles Min

Switching: 25mA at 24 VDC

NON-Switching: 100 mA at 50 VDC

ORDER INFORMATION

RHTGYT-02-N-0 0

New Piano Type SMD

Type Dip Switch

No. of Pos.:

Color:N=Black

□=Without Sealed

Packaging:0=Tube



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

DIP Switch



RHTGYT

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

G