



1 2 3 4 5 6 7 8 9


A

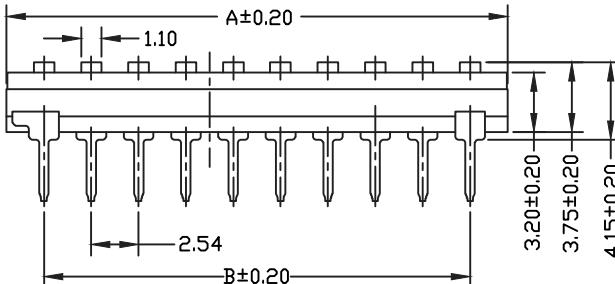


B

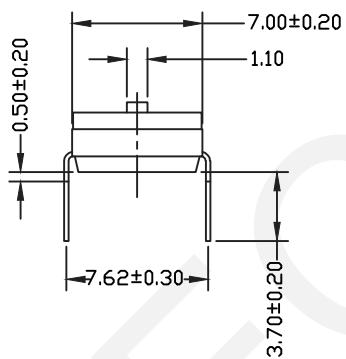

C

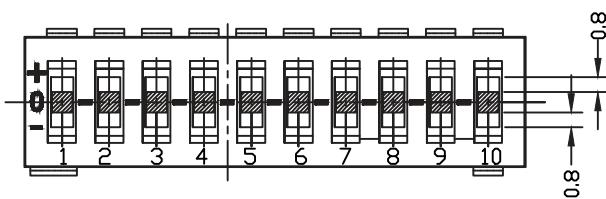

D

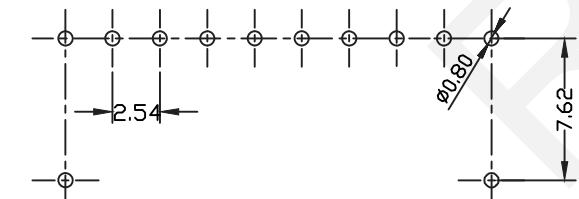

E

RECOMMENDED P.C.B. LAYOUT(TOP VIEW)

F

P _{OS.}	DIMENSIONS A	DIMENSIONS B
4P	11.64	7.62
5P	14.18	10.16
8P	21.80	17.18
9P	24.34	20.32
10P	26.88	22.86

Specifications

Contact Rating: 25 mA at 24VDC (switching)

100 mA at 50VDC (steady state)

Life: 2,000 cycles

Contact Resistance: 100mΩ Max.

Insulation Resistance: 100MΩ at 100VDC Min

Dielectric Strength: 300VAC Min

Materials

Base & Cover: PPS(UL94V-0)

Actuator: PA46(UL94V-0)

Contacts: Brass, Gold/Tin Plate

Terminals: Brass, Gold/Tin Plate

ORDER INFORMATION

RHTGY4M-XX-N-0 0

Tri-state Dip Switch

Through Type


Number of Pos.: 04~10 Pos.

Color: N=Black

0: Non-sealed

Packaging: 0=Tube

[SCHEMATIC]

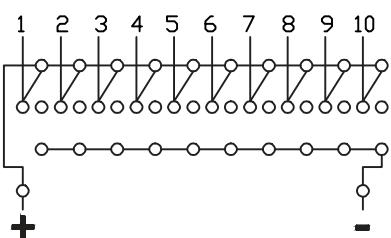

UNITS:mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

Tri-state DIP Switch Through
Hole type 2.54mm pitch



RHTGY4M



NINGBO RHT ELECTRONIC CO.,LTD

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

G