

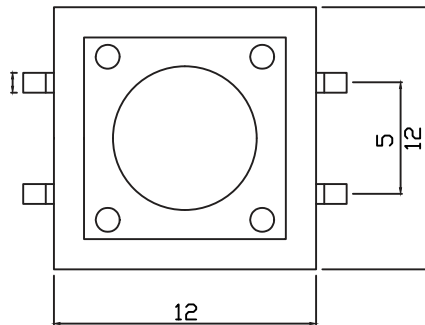
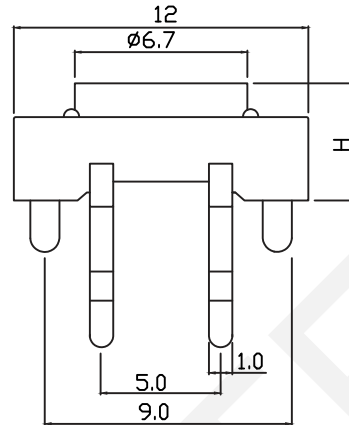


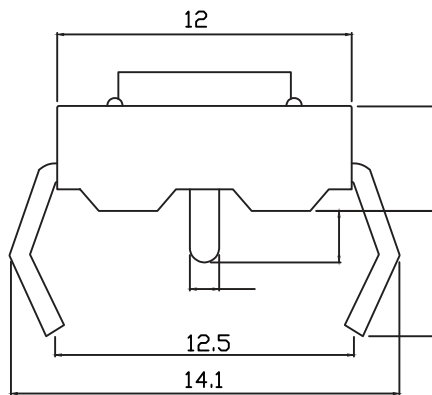

H1=4.3mm
H2=5.0mm
H3=7.0mm
H4=7.5mm



PCB LAYOUT

ELECTRICAL

- 1.Rating:50mA 12VDC
- 2.Contact Resistance :50mΩ max<Initial>
- 3.Insulation Resistance:100MΩ<minDC 250V>
- 4.Dielectric Strength:AC250V<50/60Hz For 1minute>
- 5.Electrically Life:100000 Cycles
- 6.Environment Temperature:-20℃~+70℃
- 7.Operating Force: 180/250(±30gf)
- 8.Seal Temperature:260℃~280℃

ORDER INFORMATION

RHTGYS1203-H1-180

Part Number

Height:H1=4.3mm

H2=5.0mm,H3=7.0mm,H4=7.5mm

Operating Force :180~250gf

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

12x12 Tact Switch Series

0~3


3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTGYS1203

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN