



A




B




C

①—○—○—②  
Schematic


D

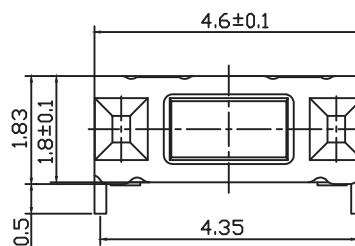

E

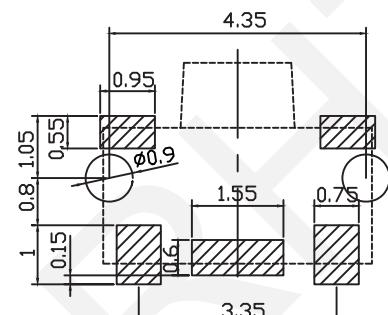

F

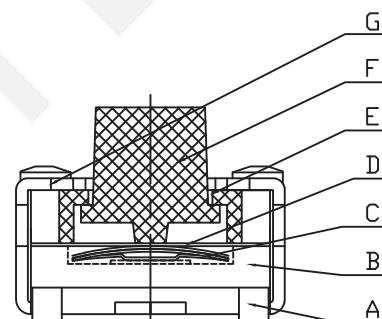

Installation Referring to FIG.

G

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

## ELECTRICAL

- 1.Rating: 50mA 12V DC
- 2.Contact Resistance : 100mΩ Max
- 3.Insulation Resistance: 100MΩ Min
- 4.Dielectric Strength : 250V AC for 1min
- 5.Electrically Life:50000cycles
- 6.Environment temperature:-30°C~+80°C
- 7.Operating Force: 160/250(±30gf)
- 8.Seal temperature:260°C~280°C

## Materials:

- A.cards:phosphor bronze 0.15,silver
- B.Base:LCP,white
- C.Reed:65G
- D.Plastic cover:LCP, white
- E.button:LCP, black
- F.Cover:phosphor bronze 0.2, silvered

## ORDER INFORMATION

RHTGYS2405-3.5-180-B

2x4 Tact Switch Series

Height:3.5mm

Operating Force:90gf,180gf,250gf

Packing: B=Bulk

