

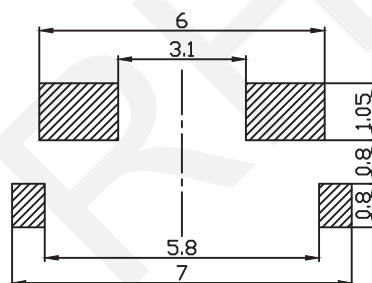
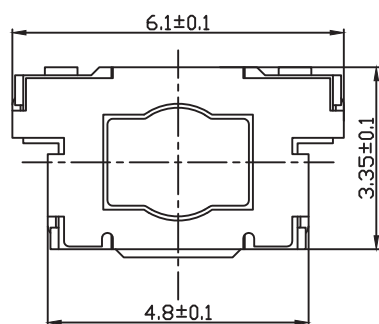



SCHEMATIC

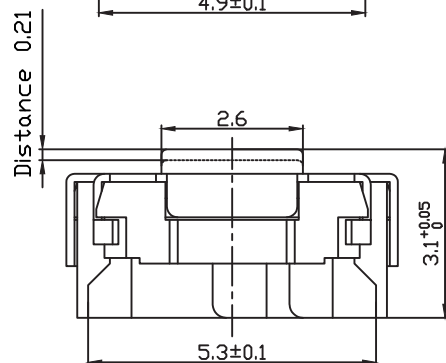

P.C.B layout

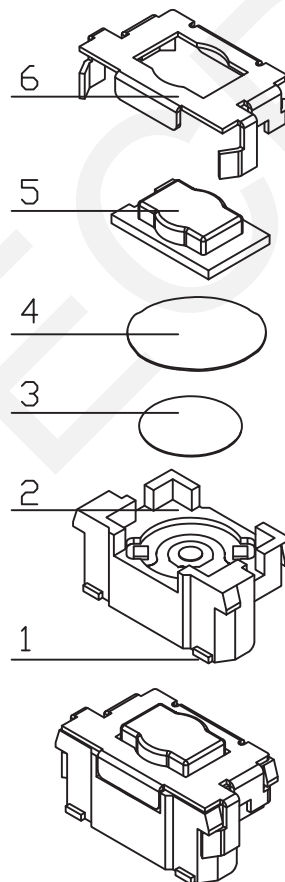

Electrical:

- 1.Rating:50mA 12V DC
- 2.Contact Resistance:100mΩ Max.
- 3.Insulation Resistance:100MΩ Min,100V DC
- 4.Dielectric voltage proof:250V AC for 1min
- 5.Electrically Life:30000 cycles Min.
- 6.Operating Force:250±50gf
- 7.Environment temperature:-30°C~+70°C

Materials:

- 1.Cards: Phosphor ,Silver
- 2.Pedestal:FR52,Black
- 3.Shrapnel:Stainless steel
- 4.Dust Film:0.05
- 5.Push button:FR52,Black
- 6.Cover:Phosphor 0.15

ORDER INFORMATION

RHTGYS3501-3.5-250-T

Series No

Height:1.8mm

Operating Force:160~250gf

Packing:B=Black,T=Tape


RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

3x5 Tact Switch Series

THIRD ANGLE PROJECTION



RHTGYS3501