

1 2 3 4 5 6 7 8 9

A

B

C

D

E

F

A

B

C





D

E

F

G

Dimension (unit: mm)

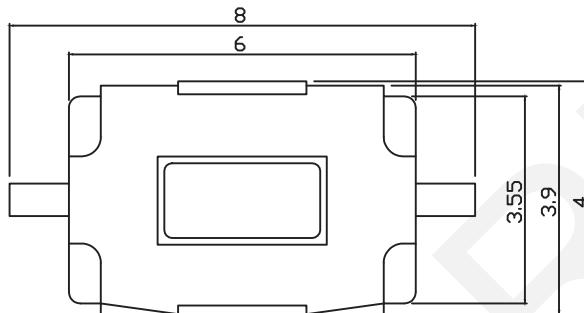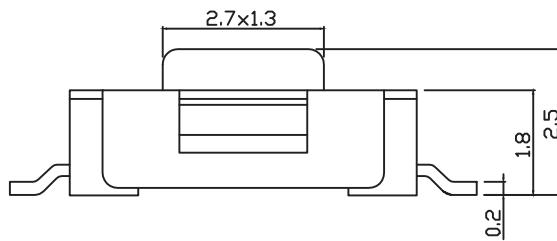

PCB LAYOUT

#### ELECTRICAL

- 1.Rating:50mA 12V DC
- 2.Contact Resistance:50mΩ Max(Initial)
- 3.Insulation Resistance:100MΩ(Min DC 250V)
- 4.Dielectric Strength:AC 250V(50/60Hz For 1minute)
- 5.Electrically Life:100000 Cycles
- 6.Environment Temperature:-30°C~+120°C
- 7.Operating Force:180/250(±30gf)
- 8.Seal Temperature:260°C~280°C

#### ORDER INFORMATION

RHTGYS3605-2.5-180-B

Series No: \_\_\_\_\_

Height:2.5mm \_\_\_\_\_

Operating Force:180~250gf \_\_\_\_\_

Packing: B=Bulk T=Tape \_\_\_\_\_

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

3x6 Tact Switch Series

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTGYS3605

1

2

3

4

5

6

7

8

9