

A

B

C

D

E

F

G

A

B







C

D

E

F

G

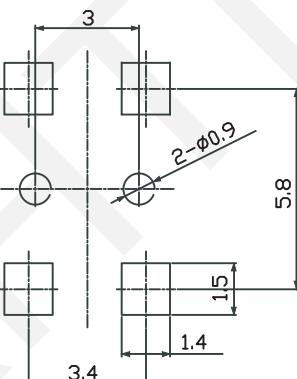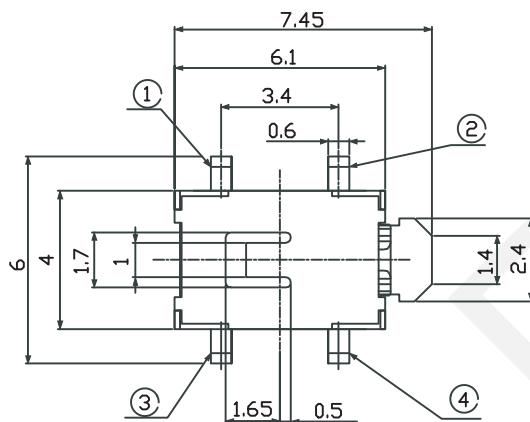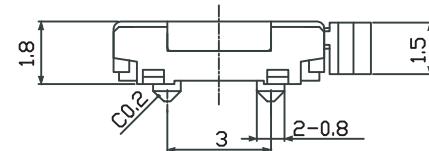

P.C.B layout

**Material:**

1.The base: LCP

2.Insert: brass, silver plated

3.Spring: stainless steel

4.According to handle: LCP, black

5.waterproof membrane:Poly selenium imide tape,yellow

**Electrical Characteristics:**

Rating:DC12V 50mA

Contact Resistance : 50mΩ max(initial)

Electrically Life:50,000cycles

Environment temperature: -25°C~105°C

Operating Force: 160/250(±30gf)

**ORDER INFORMATION**

RHTGYS3609-1.8-250-T

Series No

Height:1.8mm

Operating Force:160~250gf

Packing:B=Black,T=Tape