


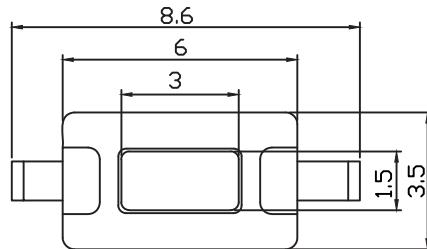



A

Dimension (unit: mm)



B

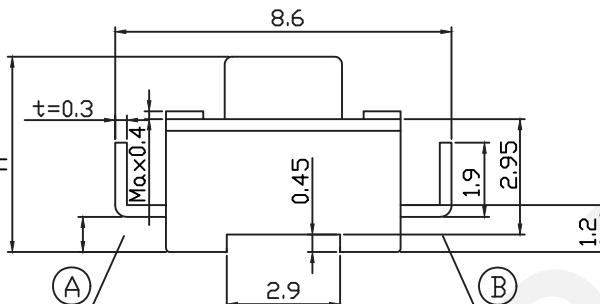

SCHEMATIC

H
4.3
5.0

ELECTRICAL

- 1.Rating:20mA 12V DC
- 2.Contact Resistance <50mΩ Max(Initial)
- 3.Insulation Resistance:100MΩ(Min DC 250V)
- 4.Dielectric Strength:AC 250V(50/60Hz For 1minute)
- 5.Electrically Life:100000 Cycles
- 6.Environment Temperature:-25°C~+70°C
- 7.Operating Force:160/250(±30gf)
- 8.Seal Temperature:260°C~280°C

ORDER INFORMATION

RHTGYS3612-4.3-160-B

Series No:

Height:4.3mm/5.0mm

Operating Force:160~250gf

Packing: B=Bulk



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

3x6 Tact Switch Series

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTGYS3612

A

B

C

D

E

F

G