



1 2 3 4 5 6 7 8 9


A

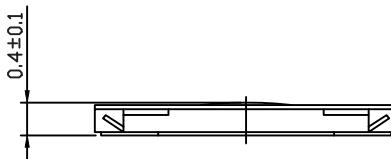


B

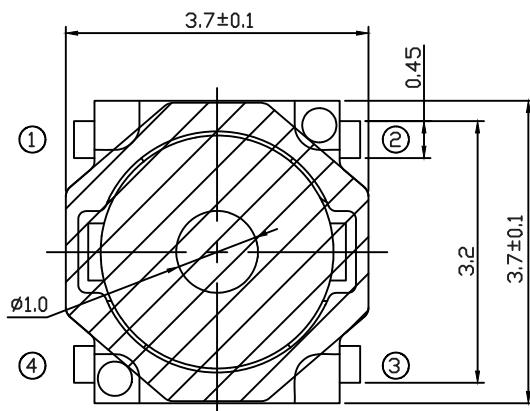


C



D

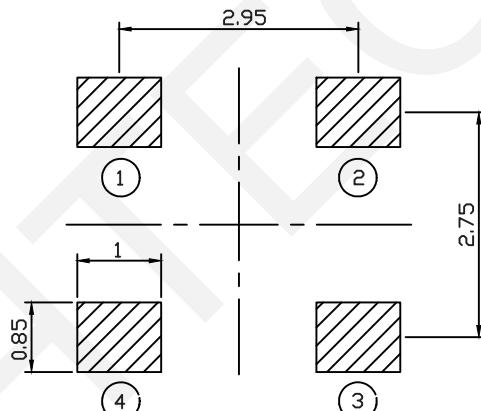

E

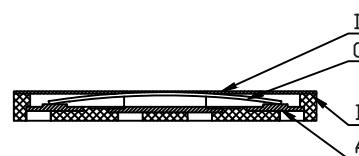

F

Installation diagram

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

3.7x3.7mm Tact Switch (U Type)



RHTGYS3737

Materials:

A. Cards: Phosphor 0.05

B. Pedestal: LCP, Black

C. Shrapnel: Stainless steel

D. Dust Film: 0.05

Electrical:

Rating: 50mA 12V DC

Contact Resistance: 200mΩ Max.

Insulation Resistance: 100MΩ Min

Dielectric voltage proof: 250V AC for 1min

Operating Force: 160±50gf

Environment temperature: -30°C ~ 80°C

Electrically Life: 100000 cycles Min.

Order Information:

RHTGYS3737-0.35-160-B

Size: 3.7x3.7mm

Height: 0.35mm

Operating Force: 160(260±50gf)

Packing: B-Bulk

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

G