

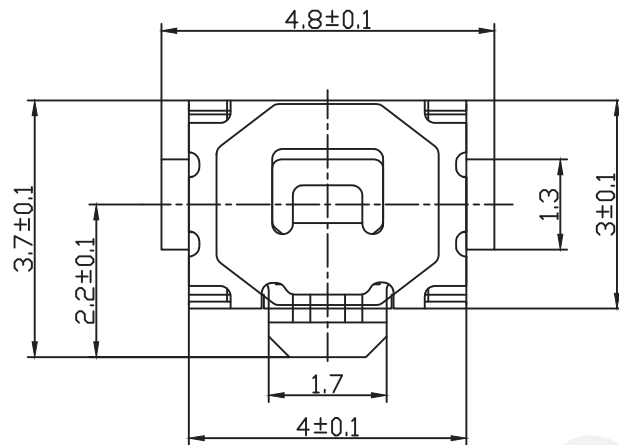
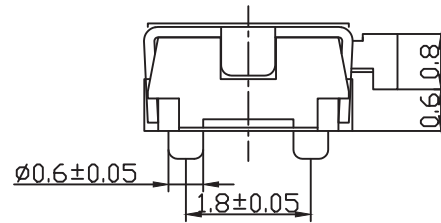
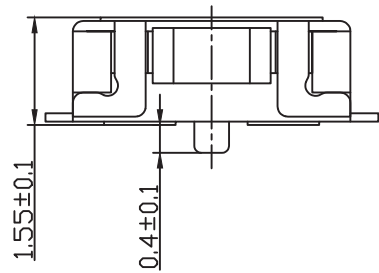


P.C.B layout



SCHEMATIC

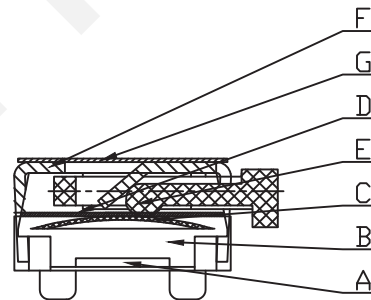

Electrical:

- 1.Rating:50mA 12V DC
- 2.Contact Resistance:100mΩ Max.
- 3.Insulation Resistance:100MΩ Min,100V DC
- 4.Dielectric voltage proof:250V AC for 1min
- 5.Electrically Life:100000 cycles Min.
- 6.Operating Force:250±50gf
- 7.Environment temperature:-30°C~+70°C

Materials:

- A.Cards: Phosphor 0.13Y ,Silver
- B.Pedestal:LCP,Black
- C.Shrapnel:70g
- D.Dust Film:0.04
- E.Push button:LCP,Black
- F.Cover:Stainless steel 0.15
- G.Dust Film:0.05

ORDER INFORMATION

RHTGYS3748-155-180-B

3.7x4.8mm Tact Switch

Height:1.55mm

Operating Force:180(±50gf)

Packing:B-Bulk

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Two small turtles,According to the side,With Post,Tact Switch

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTGYS3748