

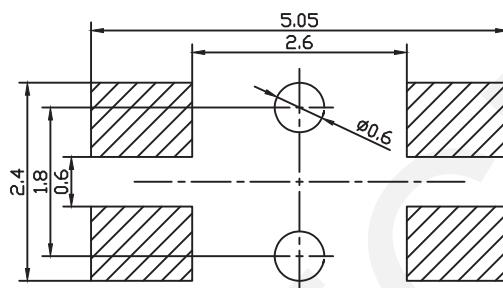
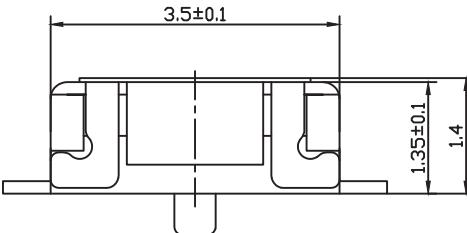



1 2 3 4 5 6 7 8 9

A

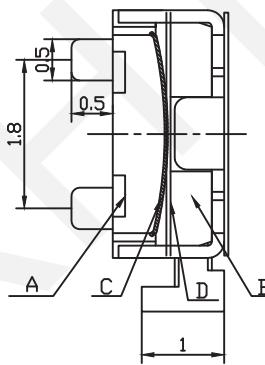

P.C.B layout

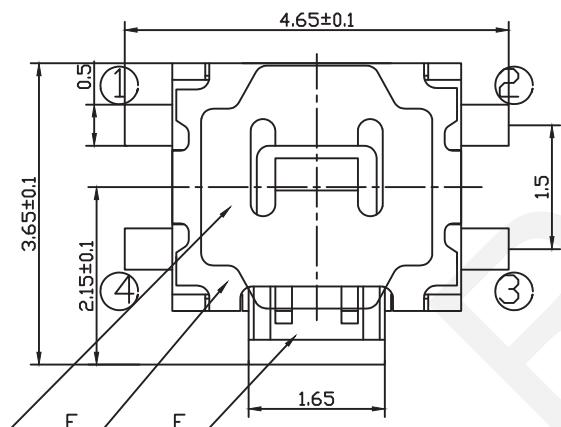

SCHEMATIC

Electrical:

- 1.Rating:50mA 12V DC
- 2.Contact Resistance:100mΩ Max.
- 3.Insulation Resistance:100MΩ Min,100V DC
- 4.Dielectric voltage proof:250V AC for 1min
- 5.Electrically Life:100000 cycles Min.
- 6.Operating Force:250±50gf
- 7.Environment temperature:-30°C~+70°C

Materials:

- A.Cards: Copper
- B.Pedestal:LCP
- C.Shrapnel:Silver coated stainless steel
- D.Dust Film:0.05
- E.Push button:PPA, Grey
- F.Cover:Stainless steel
- G.Dust Film:0.05

ORDER INFORMATION

RHTGYS5401-1.35-250-B

Tact Switch

Height:1.35mm

Operating Force:250(±50gf)

Packing:B-Bulk

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Four little turtle
(There is no column/column,general)

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12


±0.15

±0.3

±0.5

APPR BY ZHAN

THIRD ANGLE PROJECTION



RHTGYS5401

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

G