

A

B

C

D

E

F

G

A

B





C

D

E

F

G

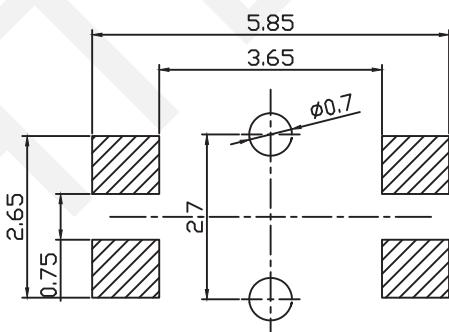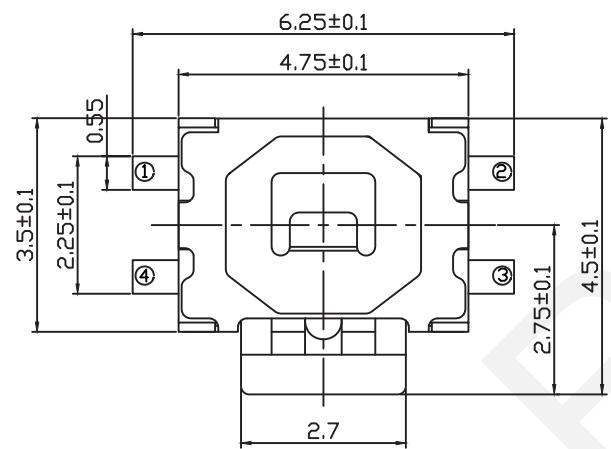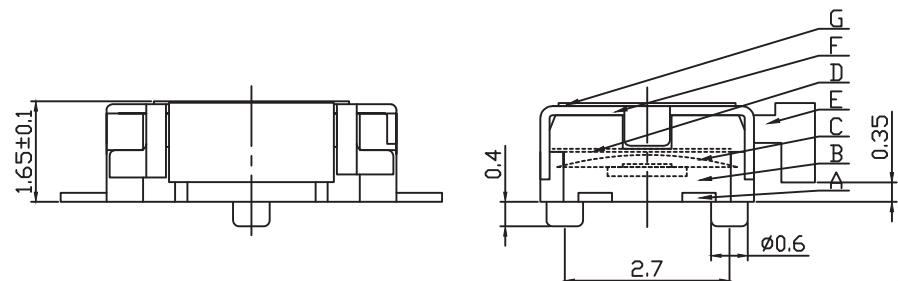

#### Electrical:

- 1.Rating:50mA 12V DC
- 2.Contact Resistance:100mΩ Max.
- 3.Insulation Resistance:100MΩ Min,100V DC
- 4.Dielectric voltage proof:250V AC for 1min
- 5.Electrically Life:100000 cycles Min.
- 6.Operating Force:250±50gf
- 7.Environment temperature:-30°C~+70°C

#### Materials:

- A.Cards: Brass,0.12Y
- B.Pedestal:LCP,Black
- C.Shrapnel:Silver coated stainless steel
- D.Dust Film:0.05
- E.Push button:PA46,Gray
- F.Cover:Stainless steel 0.05
- G.Outside the dust:0.05

#### ORDER INFORMATION

RHTGYS6635-1.65-250-B

