



1 2 3 4 5 6 7 8 9


A

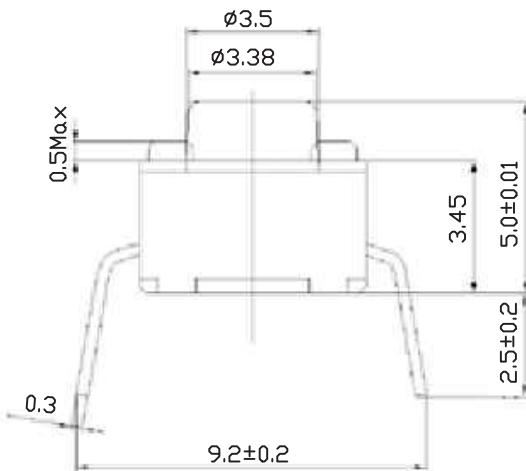

B

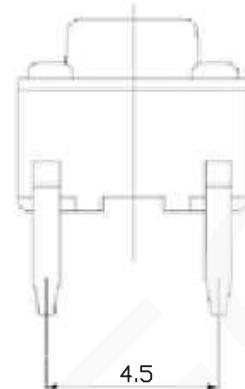

C

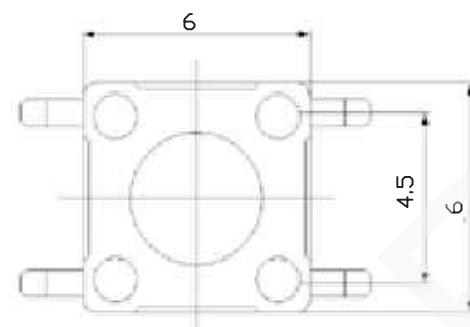

D

ELECTRICAL

- 1.Rating:50mA 12VDC
- 2.Contact Resistance:50m Ω (initial)
- 3.Insulation Resistance:100M 50V
- 4.Dielectric Strength:AC250V(50/60Hz for 1minute)
- 5.Electrically Life: 100000cycles
- 6.Environment temperature:-20°C~+70°C
- 7.Operating Force: 180/250(± 30 gf)
- 8.Seal temperature:260°C~280°C

E

ORDER INFORMATION

RHTGYS6605-H1-180-B

Part Number

Height:H1=4.3mm H2=5.0mm H3=6.0mm

H4=7.0mm H5=8.0mm H6=9.5mm

Operating Force:180~250gf

Packing: B-Bulk

F



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

6x6 Tact Switch Series

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

THIRD ANGLE PROJECTION

RHTGYS6605

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

G