



A

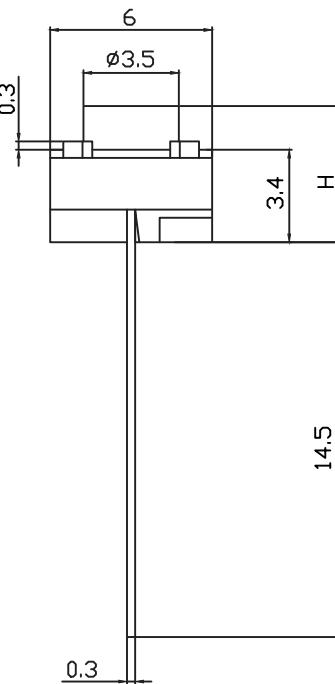

B

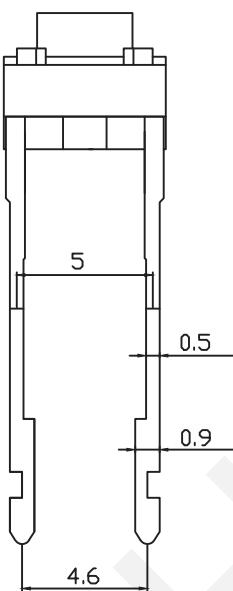


C





PCB LAYOUT

D



E



SCHEMATIC

F

## ELECTRICAL

- 1.Rating:50mA 12V DC
- 2.Contact Resistance:50mΩ Max(Initial)
- 3.Insulation Resistance:100MΩ(Min DC 250V)
- 4.Dielectric Strength:AC 250V(50/60Hz For 1minute)
- 5.Electrically Life:100000 Cycles
- 6.Environment Temperature:-20°C~+70°C
- 7.Operating Force:180/250(±30gf)
- 8.Seal Temperature:260°C~280°C

## ORDER INFORMATION

RHTGYS6613-4.3-180-B

Series No:

Height:4.3mm/5.0mm

Operating Force:180~250gf

Packing: B=Bulk T=Tape



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

6x6 Tact Switch Series

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

THIRD ANGLE PROJECTION

RHTGYS6613

A

B

C

D

E

F

G