


Electrical:

1. Turn ratio: 1~3: J1~J2=1CT:1CT(±2%), 4~6: J3~J6=1CT:1CT(±2%).
 2. \square CL: 350uH Min. at 100KHz 100mV 8mA DC.
 3. Insertion Loss: -1.0 dB Max 1~100MHz.
 4. Return loss: -20dB Min 1~10MHz; -12dB Min 30~60MHz; -10dB Min 60~80MHz.
 5. Cross talk: -40dB Min 1~30MHz; -35dB Min 30~60MHz; -30dB Min 60~100MHz;
 6. CMR: -35dB Min 1~100MHz;
 7. Hi-Pot: 1500V AC & 2250V DC
- 6S 1mA PRI TO SEC

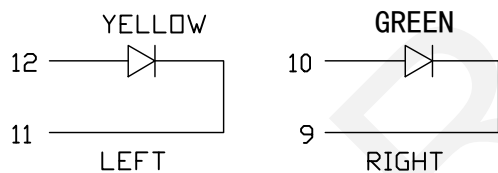

LED Specification


Standard LED Color	LED Wavelength	Foward (A)	Foward (V)
Green	568nm	20mA	1.85-2.45V
Yellow	585nm	20mA	1.7-2.2V

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN


Modular Jack with transformer

THIRD ANGLE PROJECTION



RHTLYJTL362-1X1-YG-03

PROFILE OF WAVE SOLDER

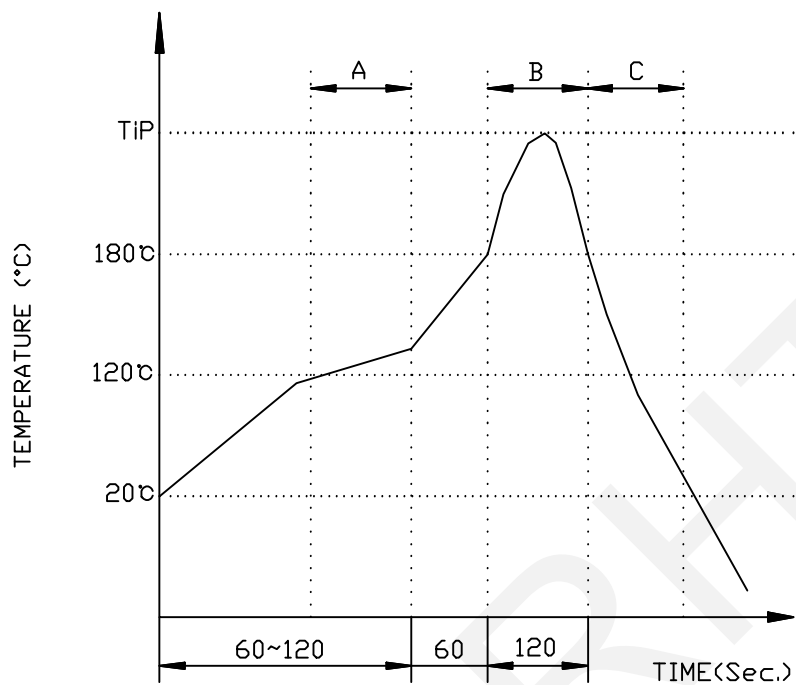

A.Preheating B.Soldering C.Gradual Cooling

Tip temperature:260±5°C.

Tip temperature time:5Sec Max.

Tip melting point of Sn96.5/Ag3/Cu0.5:217°C.

Remarks: after wave soldering, the plastic positioning columns of the product which under the PCB will be slightly melted, but it won't affect its function

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Modular Jack with transformer

0~3


3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTLYJTL362-1X1-YG-03

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN