

Order Information



RHTLYL181-1X4-G


Part Number

Ports:1x4 Ports

LED Style


G-Green/Yellow

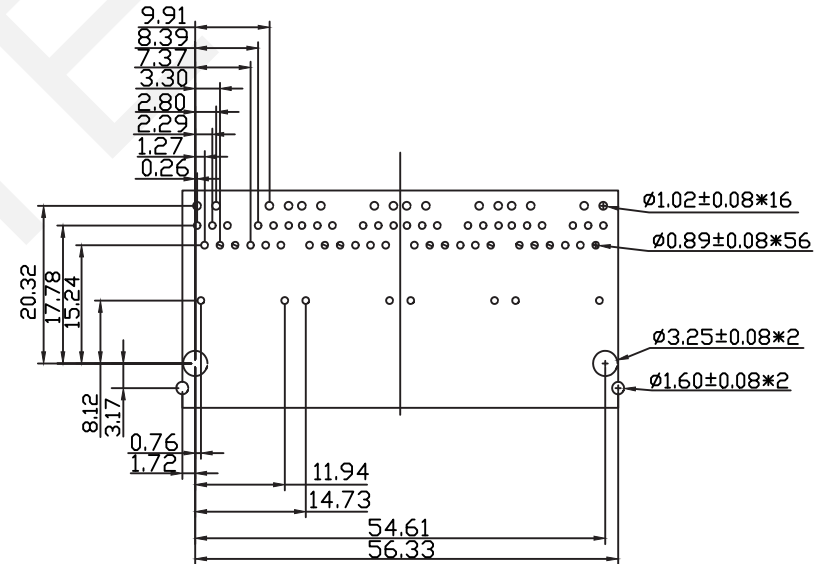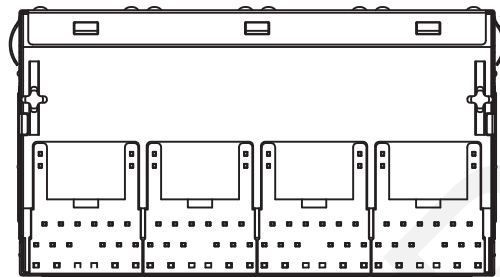


 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	1000Base1x4 Tab-up RJ45	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	RHTLYL181-1X4-G	

THIRD ANGLE PROJECTION



RHTLYL181-1X4-G

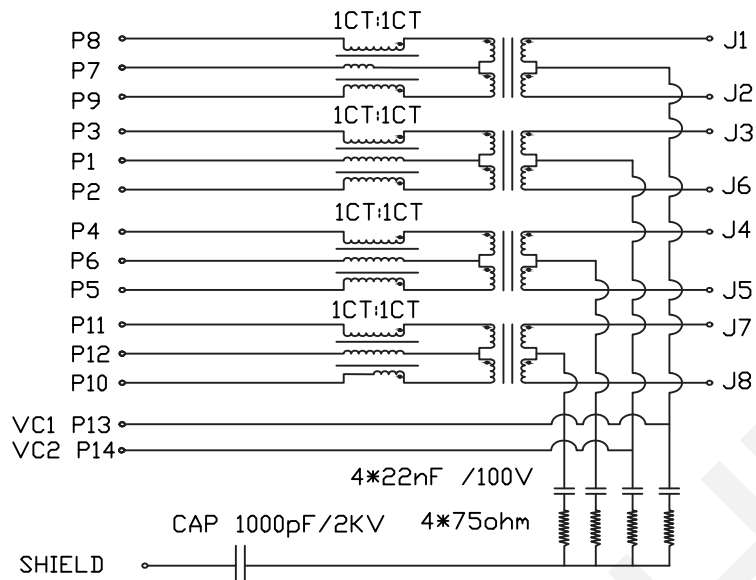

Insertion Loss: 1-100MHZ -1.0dB MAX
 Return Loss: 1-30MHZ -16.0dB MIN
 30-60MHZ -14.0dB MIN
 60-80MHZ -10.0dB MIN

Cross Talk: 1-30MHZ -40.0dB MIN
 30-60MHZ -35.0dB MIN
 60-80MHZ -30.0dB MIN
 CMR: 1-100MHZ -35.0dB MIN

Hi-Pot:(Isolation Voltage)1500v AC OR 2250 DC 6S 1mA
 100% OF PRODUCTION TESTED TO COMPLY
 WITH IEEE 802.3 ISOLATION REQUIREMENTS
 BALANCED DC LINE CURRENT 350mA MAX
 @48V DC CONTINUOUS
 DCL:350uH MIN@ 100KHZ 100mV RMS(4CHANNEL)
 11mA DC BIAS




Contacts:0.35mm thick phos bronze plated with 6u' gold in contact area
 Housing Material:PBT Black
 Operating temperature range:-40°C--+85°C

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN

1000Base1x4 Tab-up RJ45

THIRD ANGLE PROJECTION



RHTLYL181-1X4-G