



Specification.
 Frequency: 2400~2500MHz
 Gain : 2dBi
 Vswr : 1.5 Max
 Impedance : 50Ω
 Polarization : Vertical
 Radiation : OMNIDIRECTIONAL
 Max power : 50W
 Shell material: PVC
 Connector : SMA Pin Right angle
 Lightning protection: DC Grounding
 Operating Temperature: -30°C to +70°C

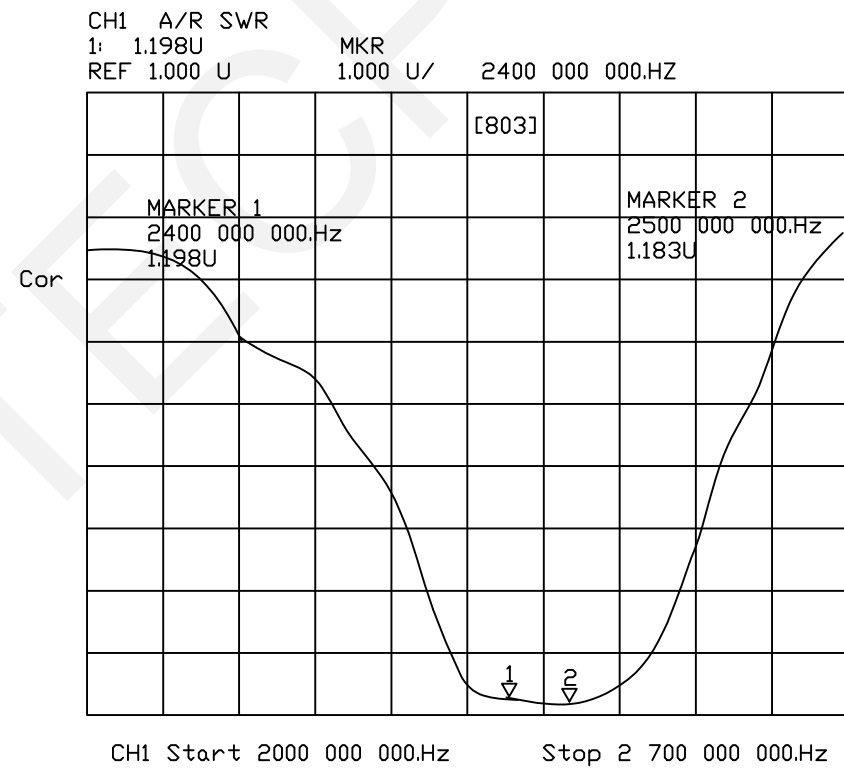

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	WIFI 2.4G Antenna	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	THIRD ANGLE PROJECTION	RHTAYIFI-2.4G-01-MR-28mm



RHTAYIFI-2.4G-01-MR-28mm