


Specification.
 Frequency: 2400~2500MHz
 Gain : 2dBi
 Vswr :1.5 Max
 Impedance :50 Ω
 Polarization : Vertical
 Radiation : OMNIDIRECTIONAL
 Max power :50W
 Shell material:PVC
 Connector :SMA Pin Straight
 Lightning protection: DC Grounding
 Operating Temperature:-30°C to+70°C

CH1 A/R SWR
 1: 1.198U MKR
 REF 1.000 U 1.000 U/ 2400 000 000.HZ

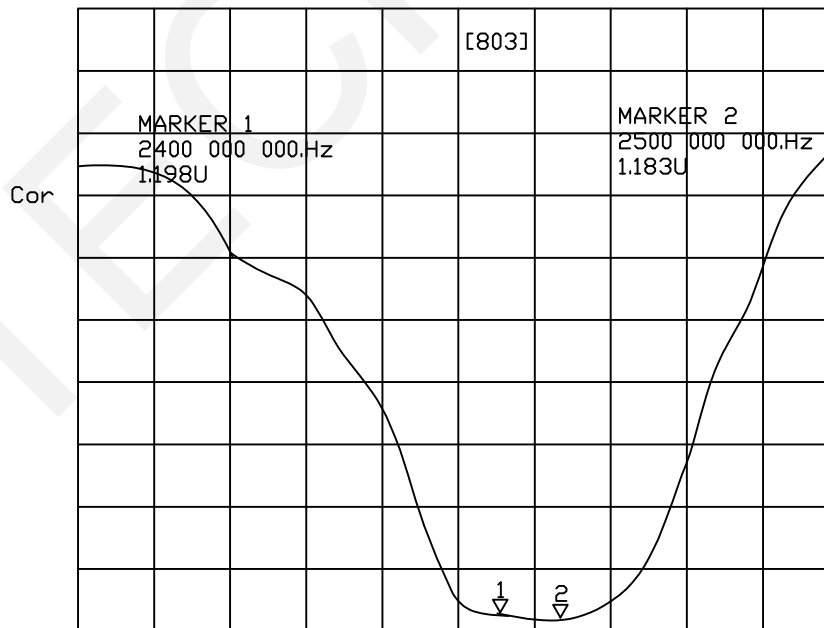

CH1 Start 2000 000 000.Hz Stop 2 700 000 000.Hz

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

WIFI 2.4G Antenna

THIRD ANGLE PROJECTION



RHTAYIFI-2.4G-01-MS-28mm