


Specification.
 Frequency: 2400~2500MHz
 Gain : 2dBi
 Vswr :1.5 Max
 Impedance :50Ω
 Polarization : Vertical
 Radiation : OMNIDIRECTIONAL
 Max power :50W
 Shell material:PVC
 Connector :SMA Pin Straight
 Lightning protection: DC Grounding
 Operating Temperature:-30°C to+70°C

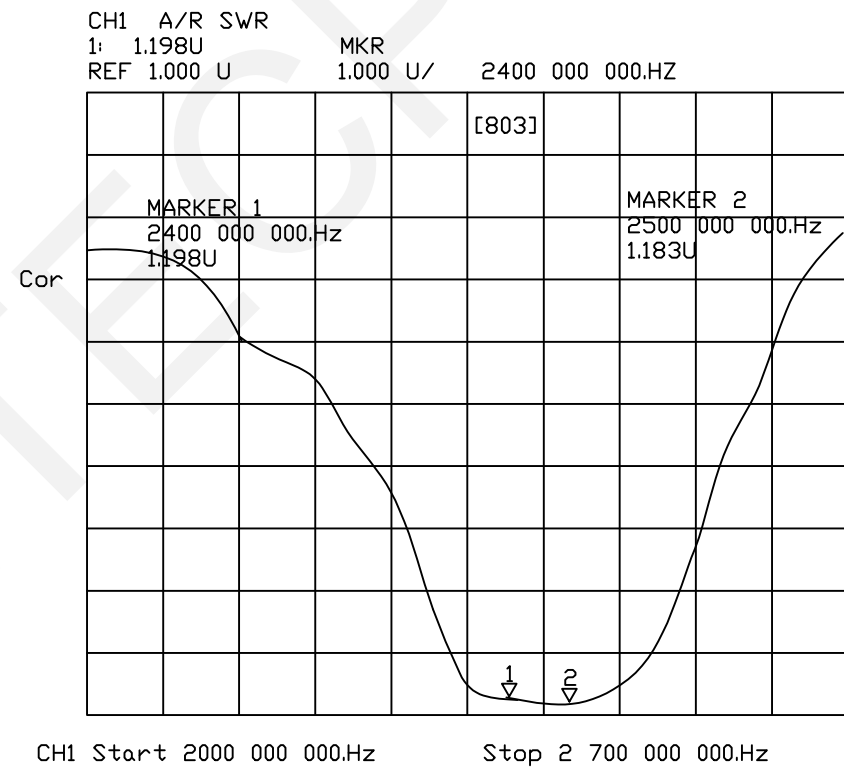

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN		

WIFI 2.4G Antenna
 RHTAYIFI-2.4G-02-MS-51mm