

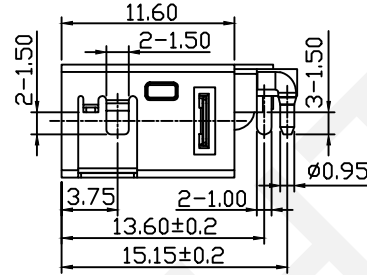
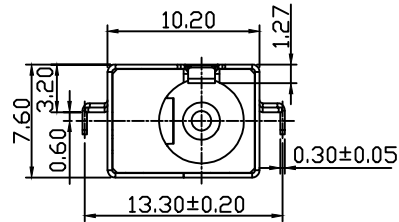

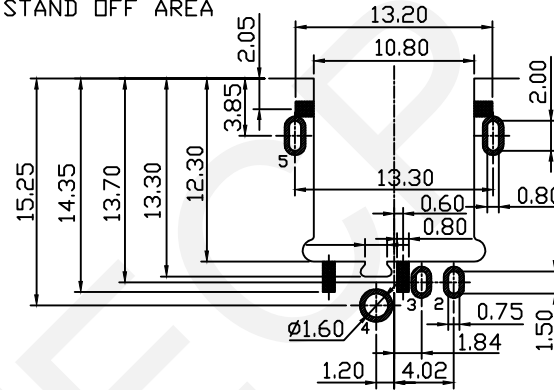


PCB Layout Tolerance:±0.05

■ STAND OFF AREA



SCHEMATIC



NO	Description	QTY	Material	Plating
1	Housing	1	LCP	---
2	Spring Piece	1	Bronze	Sn-Plating
3	Curve Piece	1	Brass	Sn-Plating
4	PIN	1	Zinc Alloy	Au-Plating
5	Coat	1	Bronze	Ni-Plating
6	PEG	1	SUS301	Ni-Plating

SPECIFICATION


Rated Load:DC 20V 7A
 Contact Resistance:30mΩ, Max
 Insulation Resistance:100MΩ, Min
 Withstand Voltage:AC500V
 Actuating Force:3-20N
 Life:5000 Cycles
 Operating Temperature:-30°C-70°C

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

20V 7A DC Jack Mid Mount 3.20mm

THIRD ANGLE PROJECTION



RHTAY13DC-036