

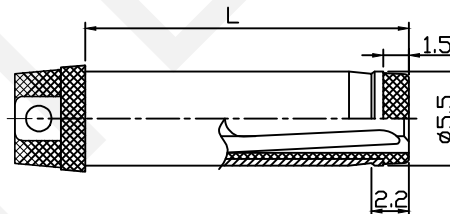
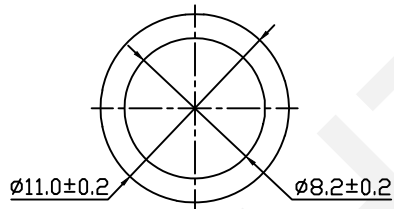



PCB LAYOUT TOP VIEW



RECOMMENDED PLUG



SPECIFICATION

Rated Load:DC 30V 5A

Contact Resistance:30mΩ, Max

Insulation Resistance:100MΩ, Min

Withstand Voltage:AC500V


Actuating Force:3-20N

Life:5000 Cycles

Operating Temperature:-30°C-70°C

PIN	∅2.0	∅2.5
APPD		

SCHEMATIC




NO	Description	QTY	Material	Plating
1	Spring	1	Bronze	Sn-Plating
2	Curve Piece	1	Brass	Sn-Plating
3	Flag Piece	1	Brass	Sn-Plating
4	PIN	1	Brass	Ni-Plating
5	Axis Support	1	Brass	Ni-Plating
6	Housing	1	PBT	---
7	NUT	1	Brass	Ni-Plating
8	Split Washer	1	Iron	Ni-Plating

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

30V 5A DC Jack DIP

THIRD ANGLE PROJECTION



RHTAYDC-025A