



RECOMMENDED PLUG

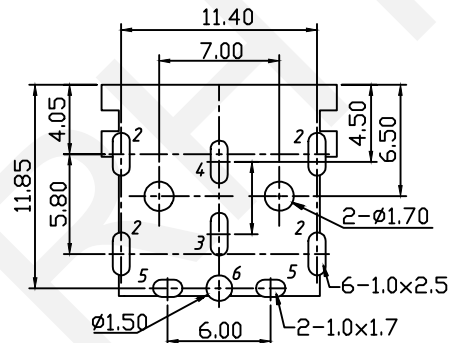

PCB LAYOUT TOP VIEW

ELECTRICAL SCHEMATIC



SPECIFICATION

Rated Load:DC 20V 10A

Contact Resistance:30mΩ, Max

Insulation Resistance:100MΩ, Min

Withstand Voltage:AC150V

Actuating Force:3-30N

Life:5000 Cycles

Operating Temperature:-25°C-85°C

NO	Description	QTY	Material	Plating
1	Housing	1	PA9T	---
2	Coat	1	Brass	Ni-Plating
3	Spring Piece	1	Bronze	Au-Plating
4	Spring Piece	1	Bronze	Au-Plating
5	Power PIN	1	Bronze	Au-Plating
6	Detect PIN	1	Bronze	Au-Plating

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

20V 10A DC Jack DIP

THIRD ANGLE PROJECTION



RHTAYDC-050