


SCHEMATIC



PCB LAYOUT TOP VIEW

SPECIFICATION

Rated Load:DC 30V 2A

Contact Resistance:30mΩ, Max


Insulation Resistance:100MΩ, Min

Withstand Voltage:AC500V

Actuating Force:3-20N

Life:5000 Cycles

Operating Temperature:-30°C-70°C

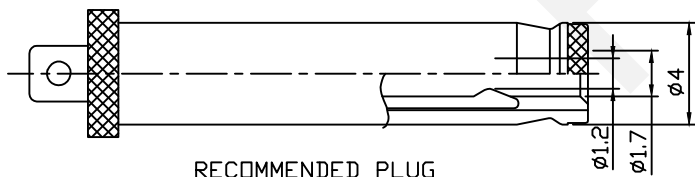

RECOMMENDED PLUG


NO	Description	QTY	Material	Plating
1	Housing	1	PA9T	---
2	PIN	1	Brass	Sn-Plating
3	Spring Piece	1	Bronze	Sn-Plating
4	Curve Piece	1	Brass	Sn-Plating
5	Flat Piece	1	Brass	Sn-Plating

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120		CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5		APPR BY ZHAN	

30V 2A DC Jack DIP

THIRD ANGLE PROJECTION



RHTAYDC-056