


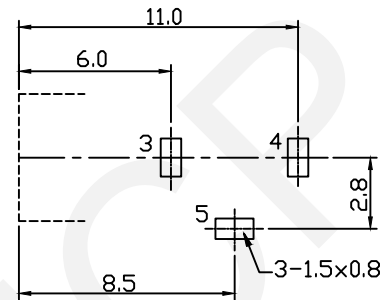
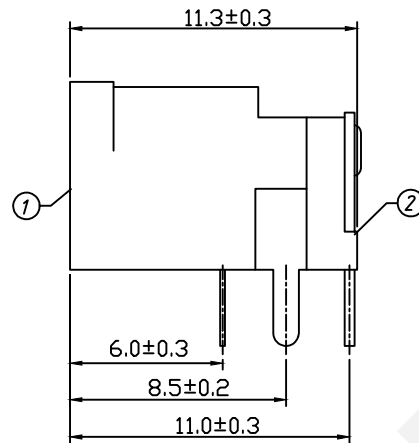
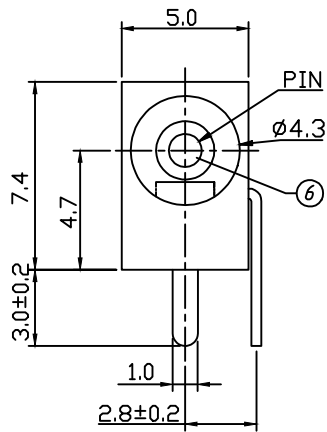




PCB LAYOUT TOP VIEW



SCHEMATIC



PIN	Ø1.0	Ø1.3	Ø1.65
APPD			

SPECIFICATION

Rated Load:DC 30V 1.0A

Contact Resistance:30mΩ, Max


Insulation Resistance:100MΩ, Min

Withstand Voltage:AC500V

Actuating Force:3~20N

Life:5000 Cycles

Operating Temperature:-30°C~70°C



RECOMMENDED PLUG

NO	Description	QTY	Material	Plating
1	Housing	1	PBT	---
2	Cover	1	PBT	---
3	Spring	1	Bronze	Sn-Plating
4	Flat Piece	1	Brass	Sn-Plating
5	Curve Piece	1	Brass	Sn-Plating
6	PIN	1	Brass	Ni-Plating




NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

DC POWER Jack DIP

THIRD ANGLE PROJECTION



RHTAYC-002A