

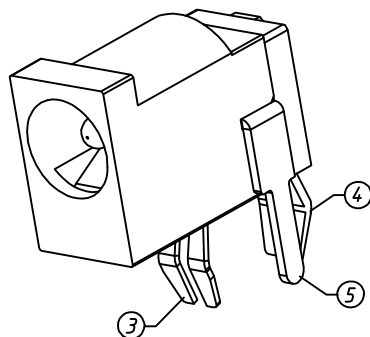
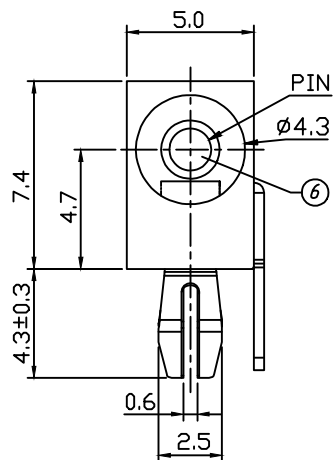


RELOMMEDED PLUG

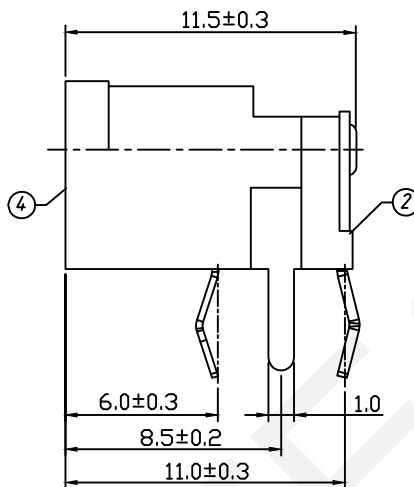


PIN	$\phi 1.0$	$\phi 1.3$
APPD		

SCHEMATIC



PCB LAYOUT TOP VIEW

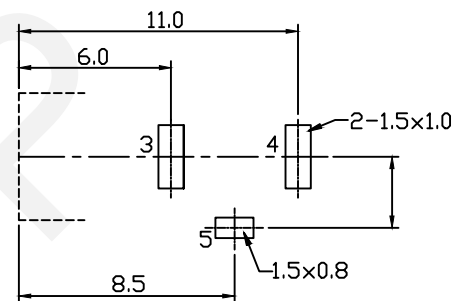

SPECIFICATION

Rated Load:DC 30V 1.0A

Contact Resistance:30m Ω , Max

Insulation Resistance:100M Ω , Min

Withstand Voltage:AC500V

Actuating Force:3-20N

Life:5000 Cycles

Operating Temperature:-30°C-70°C

NO	Description	QTY	Material	Plating
1	Housing	1	PBT	---
2	Cover	1	PBT	---
3	Spring	1	Bronze	Ag-Plating
4	Flat Piece	1	Brass	Ag-Plating
5	Curve Piece	1	Brass	Ag-Plating
6	PIN	1	Brass	Ni-Plating



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

DC POWER Jack DIP

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN



RHTAYC-002B