

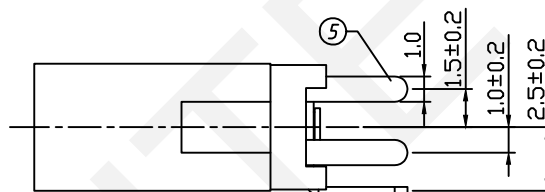
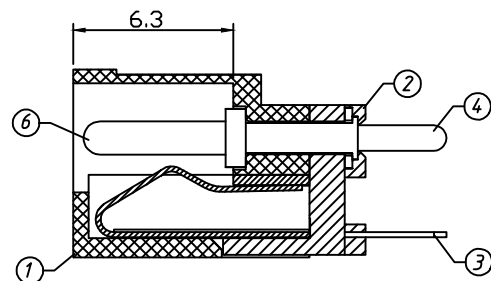



PCB LAYOUT TOP VIEW

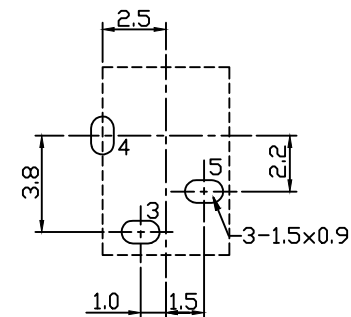

SCHEMATIC



PIN	Ø1.0	Ø1.3	Ø1.65
APPD			



NO	Description	QTY	Material	Plating
1	Housing	1	PBT/LCP	---
2	Cover	1	PBT/LCP	---
3	Spring	1	SUS301	Sn-Plating
4	Flat Piece	1	Brass	Sn-Plating
5	Curve Piece	1	Brass	Sn-Plating
6	PIN	1	Brass	Ni-Plating

SPECIFICATION

Rated Load:DC 30V 1.0A
 Contact Resistance:30mΩ, Max
 Insulation Resistance:100MΩ, Min
 Withstand Voltage:AC500V
 Actuating Force:3-20N
 Life:5000 Cycles
 Operating Temperature:-30°C~70°C



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
			CHK'D BY FENG
			APPR BY ZHAN

DC POWER Jack DIP

THIRD ANGLE PROJECTION



RHTAYC-002F