

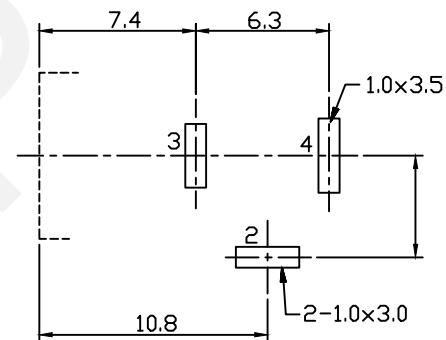


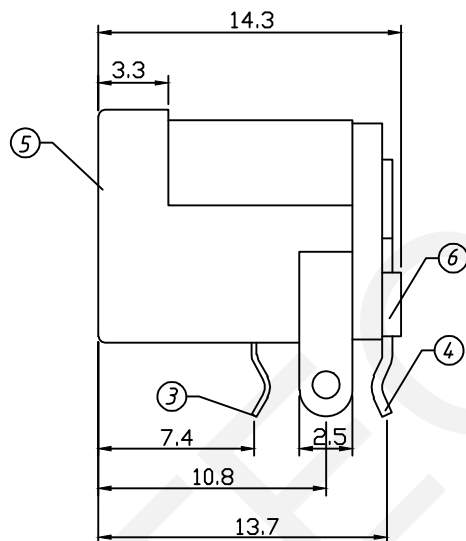

PCB LAYOUT TOP VIEW

PIN	Ø2.0	Ø2.5
APPD		

SCHEMATIC

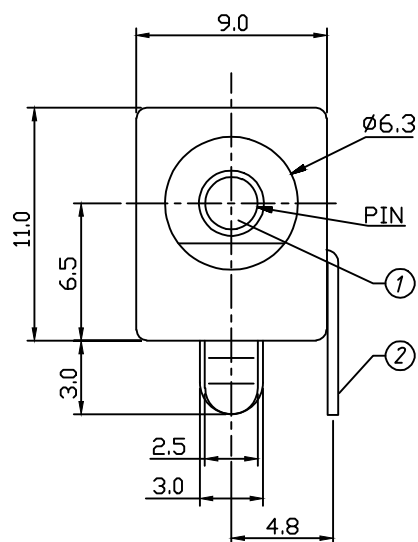

NO	Description	QTY	Material	Plating
1	PIN	1	H59 Brass	Ni-Plating
2	Curve Piece	1	H62 Brass	Ag-Plating
3	Spring	1	Bronze	Ag-Plating
4	Flat Piece	1	H62 Brass	Ag-Plating
5	Housing	1	PBT	---
6	Cover	1	PBT	---

SPECIFICATION

Rated Load:DC 30V 0.5A
Contact Resistance:30mΩ, Max
Insulation Resistance:100MΩ, Min
Withstand Voltage:AC500V
Actuating Force:3-20N
Life:5000 Cycles
Operating Temperature:-30°C-70°C




NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

DC POWER Jack DIP



RHTAYC-005D-2.5