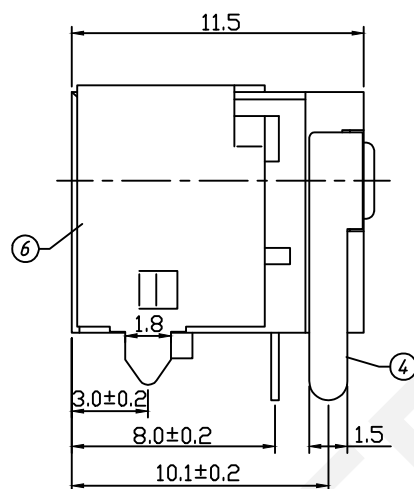
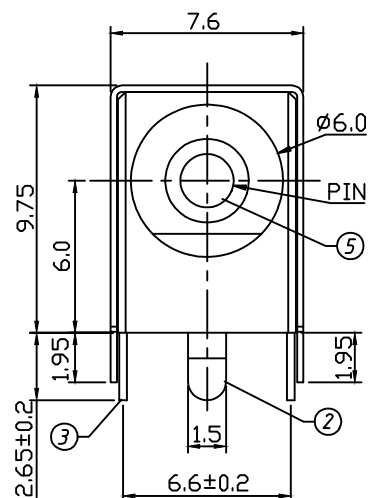


SPECIFICATION

Rated Load:DC 30V 1.0A

Contact Resistance: 30mΩ, Max


Insulation Resistance:100MΩ, Min

Withstand Voltage:AC500V


Actuating Force: 5-30N

Life:5000 Cycles


Operating Temperature: -30°C-70°C

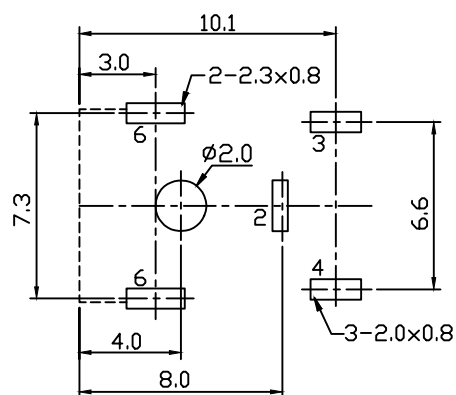

PCB LAYOUT TOP VIEW

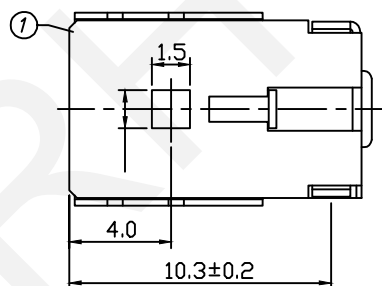

SCHEMATIC



NO	Description	QTY	Material	Plating
1	Housing	1	PPT	---
2	Spring	1	SUS301	Ag-Plating
3	Curve Piece	1	Brass	Ag-Plating
4	Contact Foot	1	Brass	Ag-Plating
5	PIN	1	Brass	Ni-Plating
6	Coat	1	Brass	Ni-Plating