


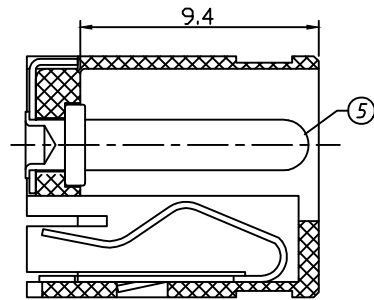
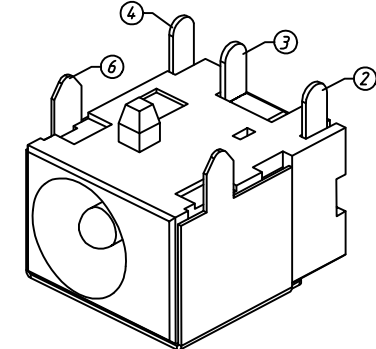

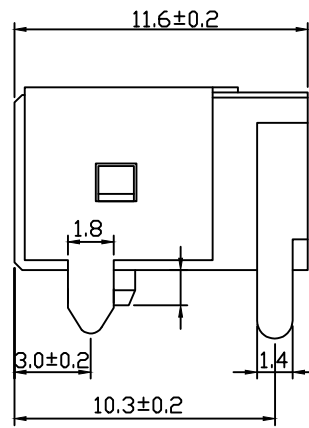


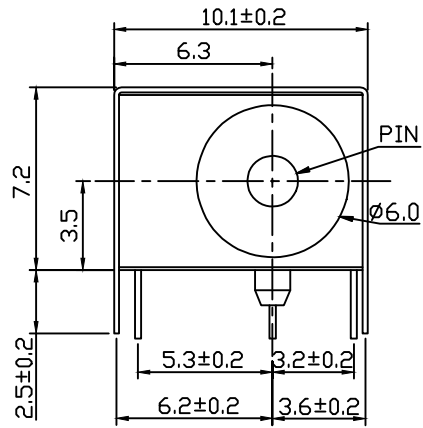


PCB LAYOUT TOP VIEW

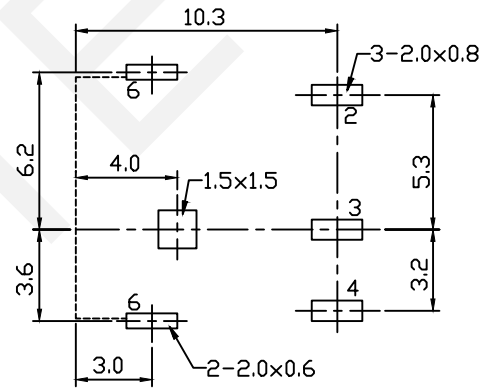

SPECIFICATION
 Rated Load:DC 30V 1.0A
 Contact Resistance:30mΩ, Max
 Insulation Resistance:100MΩ, Min
 Withstand Voltage:AC500V
 Actuating Force:5-30N
 Life:5000 Cycles
 Operating Temperature:-30°C-70°C

SCHEMATIC



PIN	Ø2.0	Ø2.5
APPD		

NO	Description	QTY	Material	Plating
1	Housing	1	PBT/PA9T	---
2	Spring Piece	1	SUS301	Ag-Plating
3	Curve Piece	1	Brass	Ag-Plating
4	Contact Foot	1	Brass	Ag-Plating
5	PIN	1	Brass	Ni-Plating
6	Contact Foot	1	Bronze	Ag-Plating



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

DC POWER Jack DIP

THIRD ANGLE PROJECTION



RHTAYC-018