

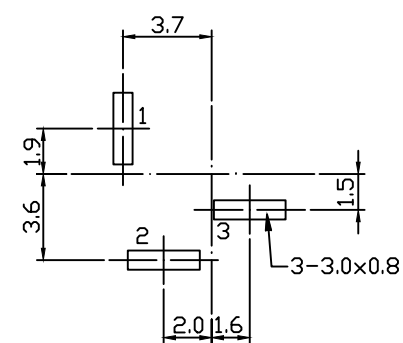
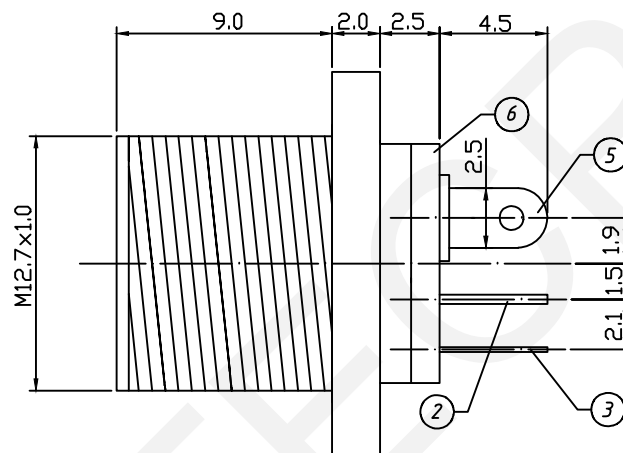


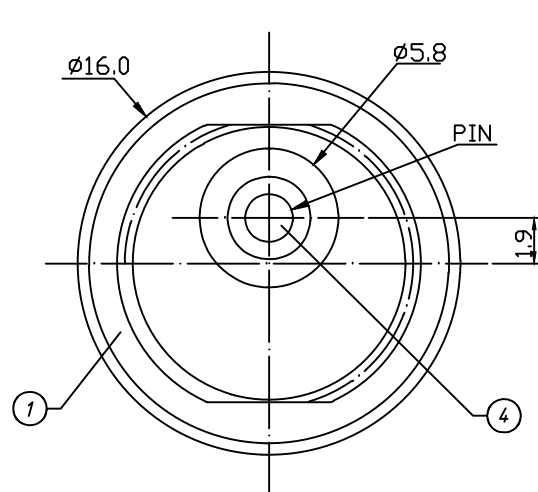

T:16 Dimensions of PC board holes
Tolerance:±0.1 (Printed-top view)

PIN	ø2.0	ø2.5
APPD		

SCHEMATIC



NO	Description	QTY	Material	Plating
1	Housing	1	PBT	---
2	Flag Piece	1	C2680	MBiCu Cu/Sn Plating
3	Spring	1	65Mn Steel	MBiCu Cu/Sn Plating
4	PIN	1	C2680	MBiCu Ni Plating
5	Contact Foot	1	C2680	MBiCu Cu/Sn Plating
6	Cover	1	PF	---

SPECIFICATION

Rated Load:DC 30V 1.0A

Contact Resistance:30mΩ, Max

Insulation Resistance:100MΩ, Min

Withstand Voltage:AC500V

Actuating Force:3-20N

Life:5000 Cycles


Operating Temperature:-30°C-70°C



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

THIRD ANGLE PROJECTION



DC POWER Jack DIP

RHTAYC-022A