


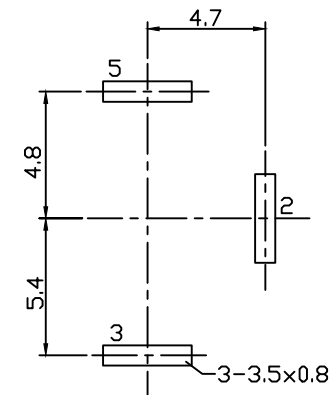
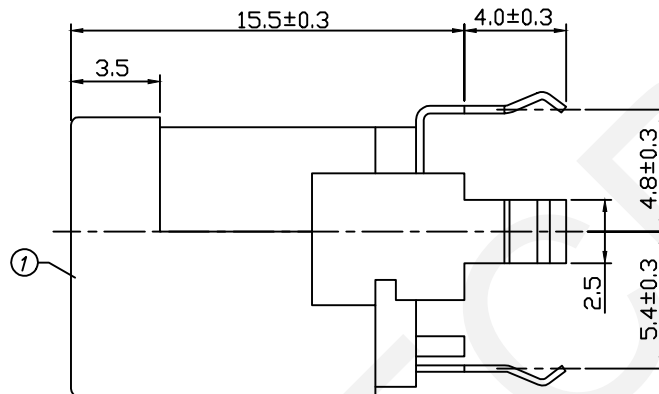
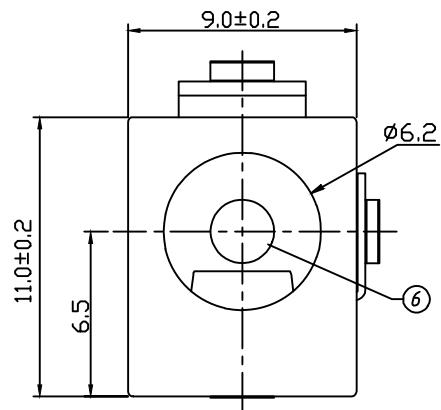




PCB LAYOUT TOP VIEW

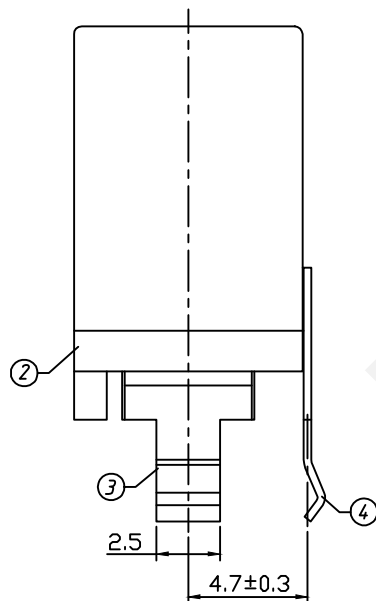

SCHEMATIC



PIN	ø2.0	ø2.5
APPD		

SPECIFICATION

Rated Load:DC 30V 1.0A

Contact Resistance:30mΩ, Max

Insulation Resistance:100MΩ, Min

Withstand Voltage:AC500V

Actuating Force:3-20N

Life:5000 Cycles

Operating Temperature:-30°C-70°C

NO	Description	QTY	Material	Plating
1	Housing	1	PBT	---
2	Cover	1	PBT	---
3	Spring	1	Bronze	Sn-Plating
4	Flat Piece	1	Brass	Sn-Plating
5	Curve Piece	1	Brass	Sn-Plating
6	PIN	1	Brass	Ni-Plating



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

DC POWER Jack DIP

0~3


3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTAYC-023A

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN