


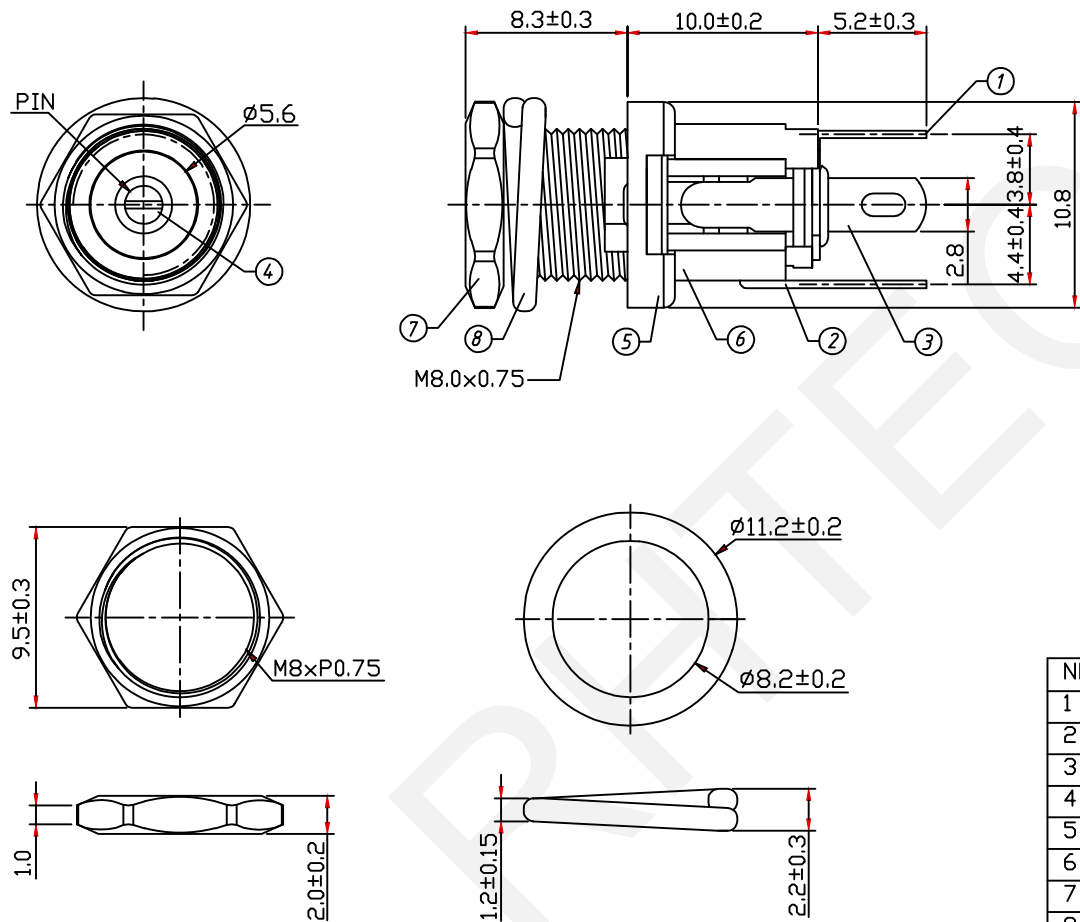

SPECIFICATION

Rated Load:DC 30V 0.5A

Contact Resistance:30mΩ, Max

Insulation Resistance:100MΩ, Min

Withstand Voltage:AC500V

Actuating Force:3-20N

Life:5000 Cycles

Operating Temperature:-30°C-70°C

SCHEMATIC



PIN	ø2.0	ø2.5
APPD		

NO	Description	QTY	Material	Plating
1	1# Curve Piece	1	Brass	Sn-Plating
2	2# Curve Piece	1	Brass	Sn-Plating
3	Spring	1	Bronze	Sn-Plating
4	PIN	1	Brass	Ni-Plating
5	Axis Support	1	Brass	Ni-Plating
6	Housing	1	PBT	---
7	Nut	1	Brass	Ni-Plating
8	Split Washer	1	Iron	Ni-Plating




NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

DC POWER Jack DIP

THIRD ANGLE PROJECTION



RHTAYC-025G