


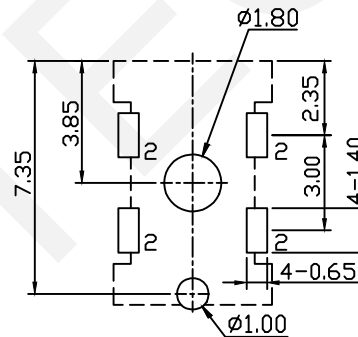
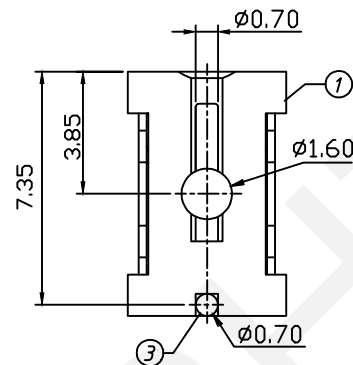



SCHEMATIC



PCB LAYOUT TOP VIEW

SPECIFICATION

Rated Load:DC 30V 0.5A
Contact Resistance:30mΩ, Max
Insulation Resistance:100MΩ, Min
Withstand Voltage:AC500V
Actuating Force:3-20N
Life:5000 Cycles
Operating Temperature:-30°C-70°C

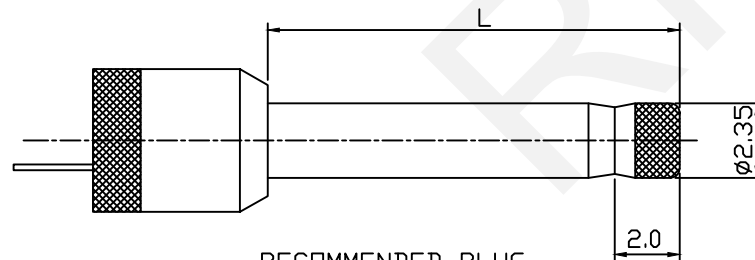

RECOMMENDED PLUG

NO	Description	QTY	Material	Plating
1	Housing	1	PA9T	---
2	Contact Foot	1	Bronze	Ag-Plating
3	PIN	1	Bronze	Ag-Plating



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

DC POWER Jack DIP

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAYC-037